



US008127474B2

(12) **United States Patent**
Phillips

(10) **Patent No.:** **US 8,127,474 B2**
(45) **Date of Patent:** **Mar. 6, 2012**

- (54) **DREDGING APPARATUS**
- (75) Inventor: **Richard John Phillips**, Crystal River, FL (US)
- (73) Assignees: **Richard John Phillips**, Crystal River, FL (US); **Cheryl F. Phillips**, Crystal River, FL (US)
- (*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 70 days.

3,738,029	A *	6/1973	Harmon	37/329
3,755,932	A *	9/1973	Cargile, Jr.	37/331
3,919,790	A *	11/1975	Sasaki et al.	37/329
4,102,064	A *	7/1978	Pot	37/310
4,242,815	A *	1/1981	Vermeulen	37/308
4,267,652	A *	5/1981	Senesac	37/329
4,311,066	A *	1/1982	Schuhmann	475/76
4,311,342	A *	1/1982	Latimer	299/8
4,351,122	A *	9/1982	Cornelis et al.	37/308
4,352,250	A *	10/1982	de Vries	37/334
4,585,274	A *	4/1986	Grable	299/7
4,887,371	A *	12/1989	Kaiser	37/309
7,513,008	B2 *	4/2009	Tucker	15/320
7,721,472	B2 *	5/2010	Buhr et al.	37/317

(21) Appl. No.: **12/490,448**

(22) Filed: **Jun. 24, 2009**

(65) **Prior Publication Data**

US 2010/0011627 A1 Jan. 21, 2010

- (51) **Int. Cl.**
E02F 9/10 (2006.01)
 - (52) **U.S. Cl.** **37/334**; 37/333; 37/311; 37/313
 - (58) **Field of Classification Search** 37/307, 37/317, 334, 345, 309, 311, 313, 318, 320, 37/321, 322, 333, 335, 336
- See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

566,473	A *	8/1896	Robinson	37/331
1,254,357	A *	1/1918	Reid	37/334
2,204,584	A *	6/1940	Flower	119/235
2,205,490	A *	6/1940	Peterson	37/308
3,152,409	A *	10/1964	Ramsden et al.	37/322
3,273,664	A *	9/1966	Ramer	180/400
3,521,387	A *	7/1970	Degelman	37/310
3,579,872	A *	5/1971	Jantzen	37/310

OTHER PUBLICATIONS

Citrus County Chronicle, Local Resident Invents Aquatic "Muck Sucker", Dec. 5, 2007, viewed at <http://www.chronicleonline.com>. Equipment Specialties Co., P20-Piranha Dredge (specification sheet), viewed at http://piranhapump.com/files/p20_manual.pdf on Jun. 23, 2009.

* cited by examiner

Primary Examiner — Robert Pezzuto


Assistant Examiner — Jamie L McGowan

(74) *Attorney, Agent, or Firm* — Law Office of Steven R. Olsen, PLLC; Steven R. Olsen

(57) **ABSTRACT**

In embodiments of the invention, a dredging head assembly uses vacuum only, or a combination of vacuum and flexible PVC tines, rather than the harsh digging and/or scraping features of conventional dredging equipment. Embodiments of the invention also provide a dredging head assembly that may be used in very shallow water. An embodiment of the invention includes a hose and wand to enable vacuuming around obstacles.

16 Claims, 11 Drawing Sheets

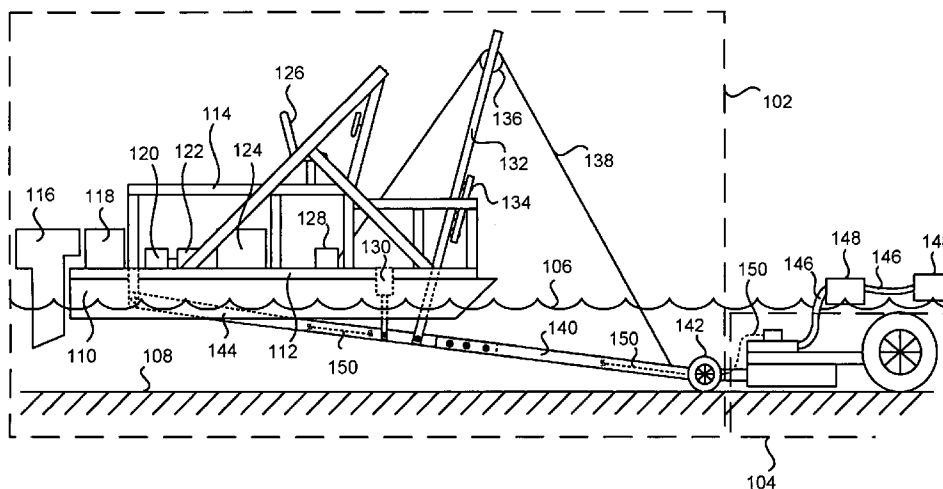

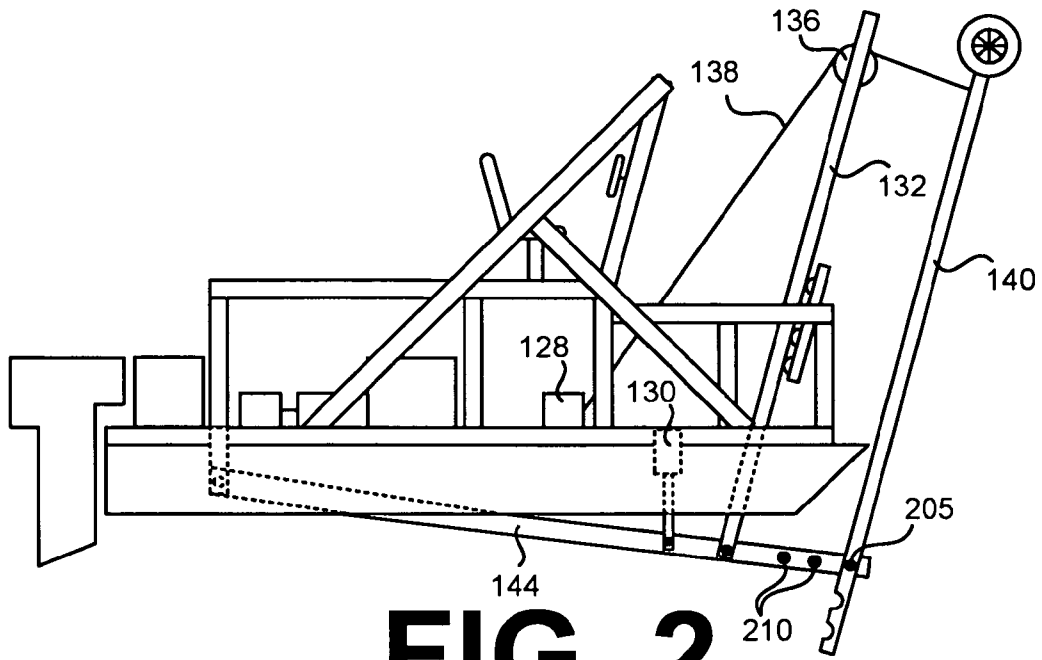


FIG. 2

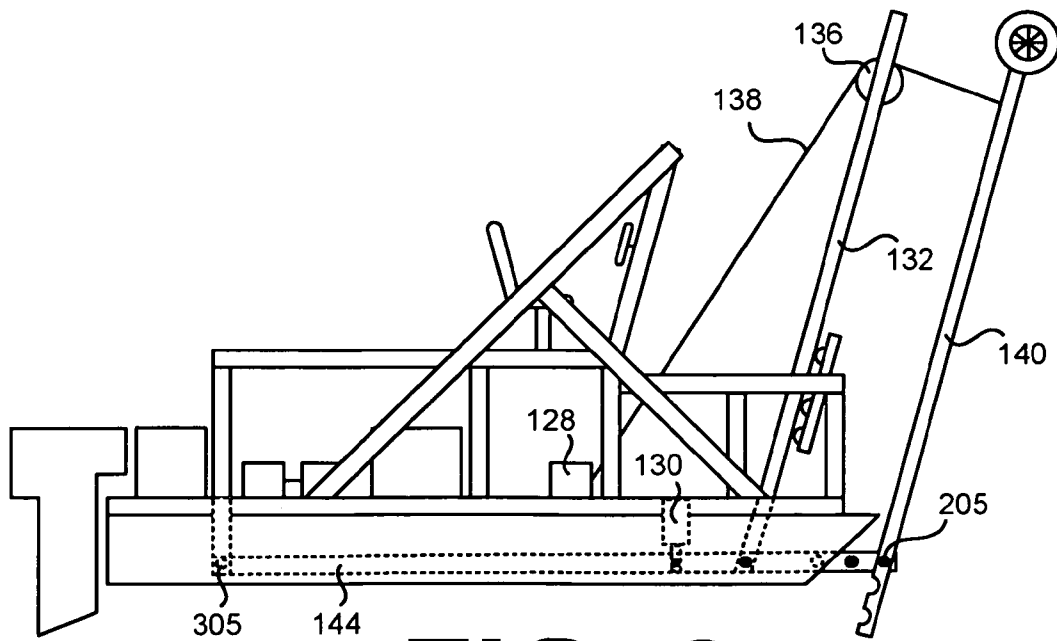


FIG. 3

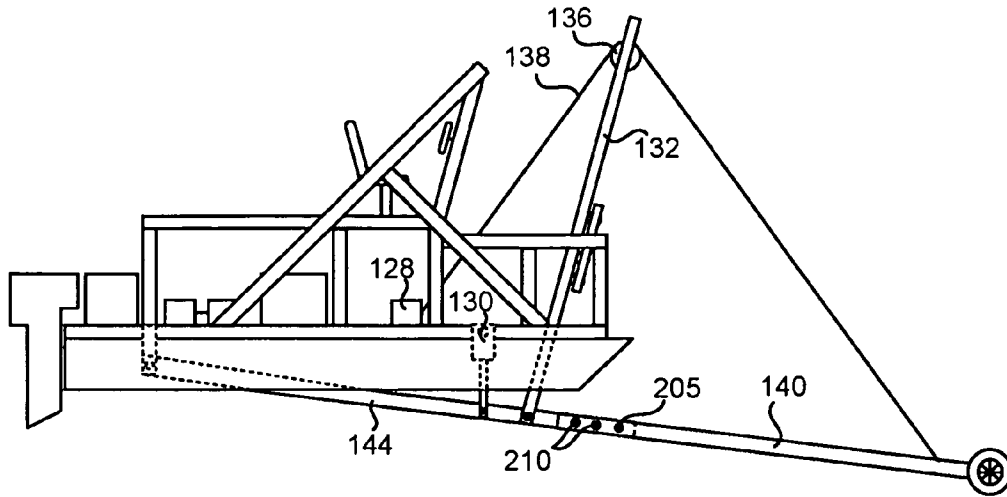


FIG. 4

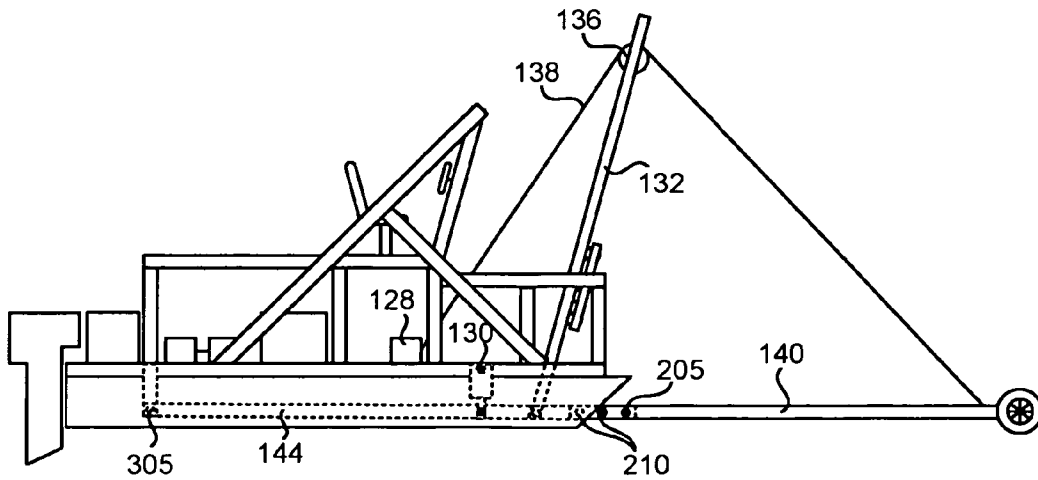


FIG. 5

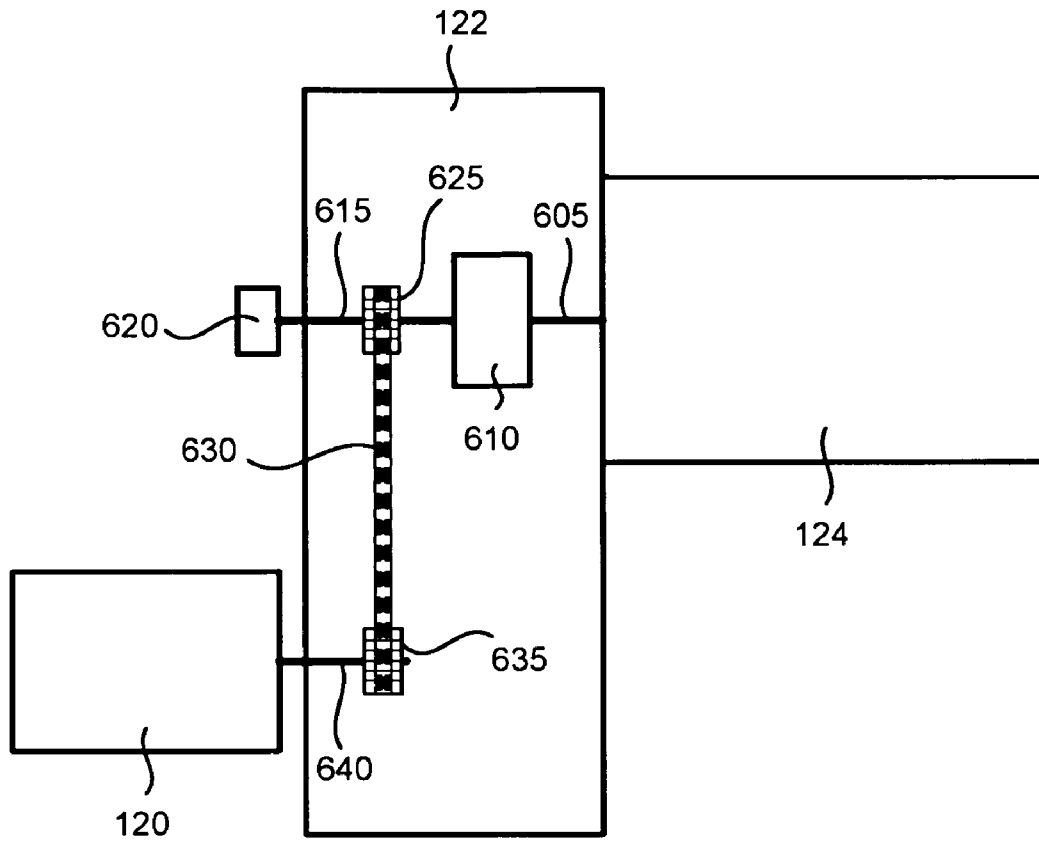


FIG. 6

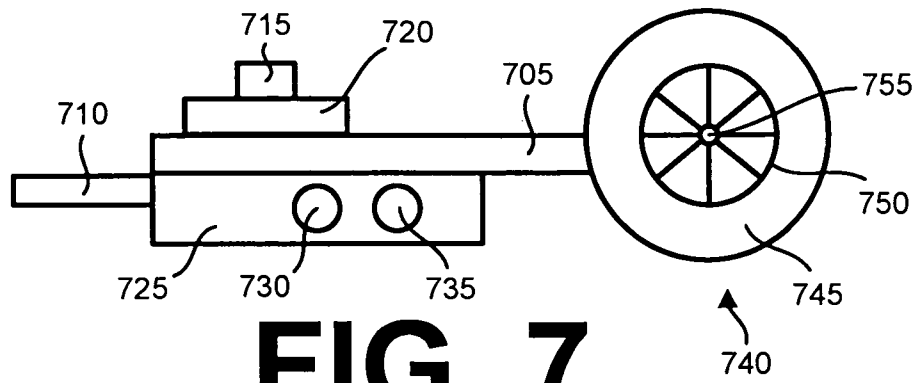


FIG. 7

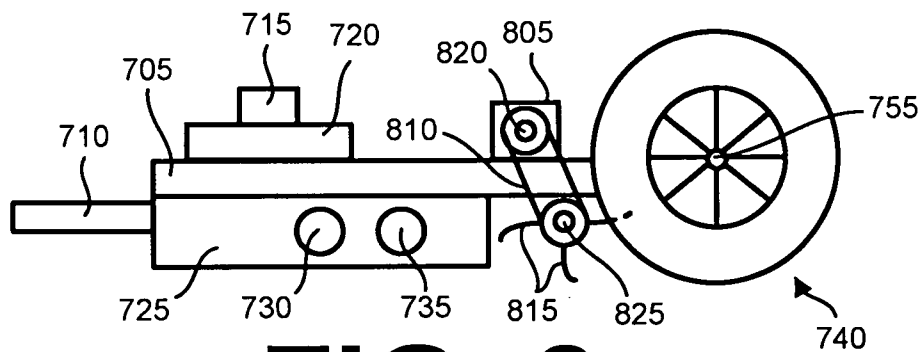


FIG. 8

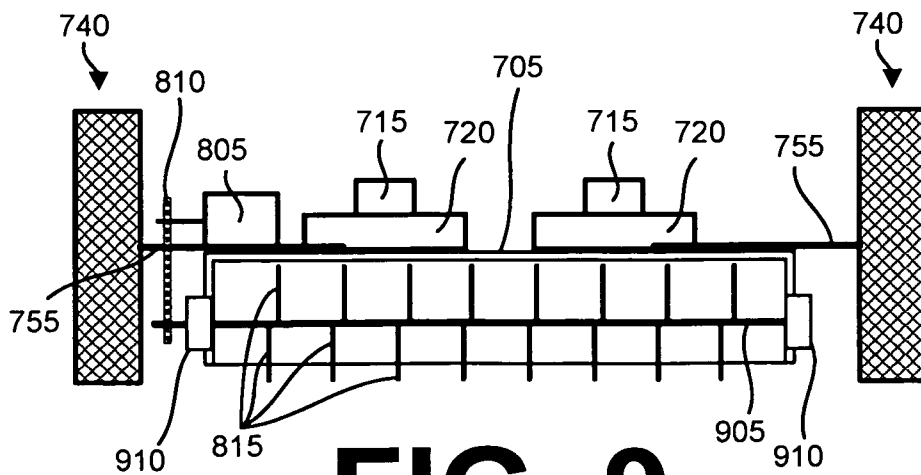


FIG. 9

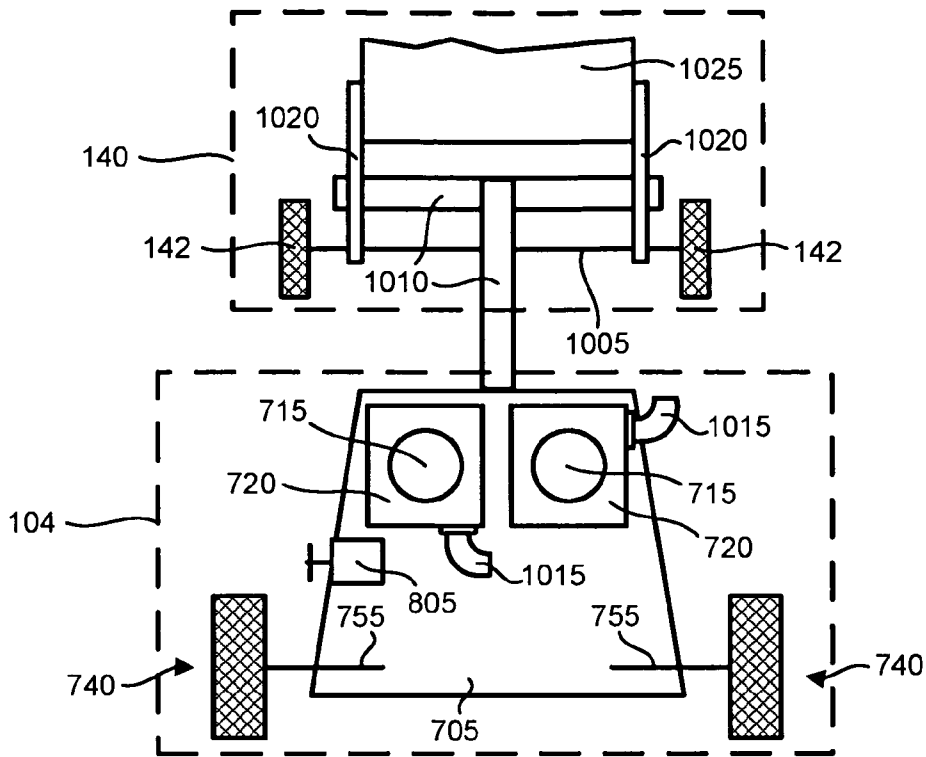


FIG. 10

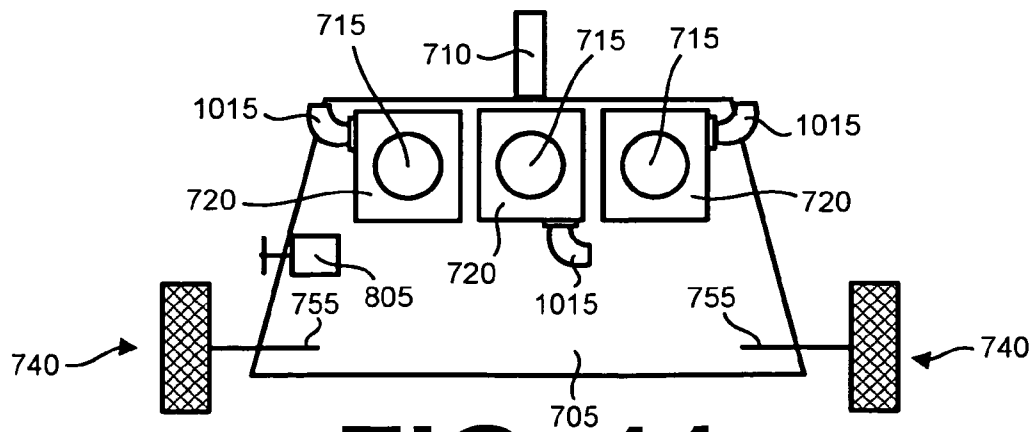


FIG. 11

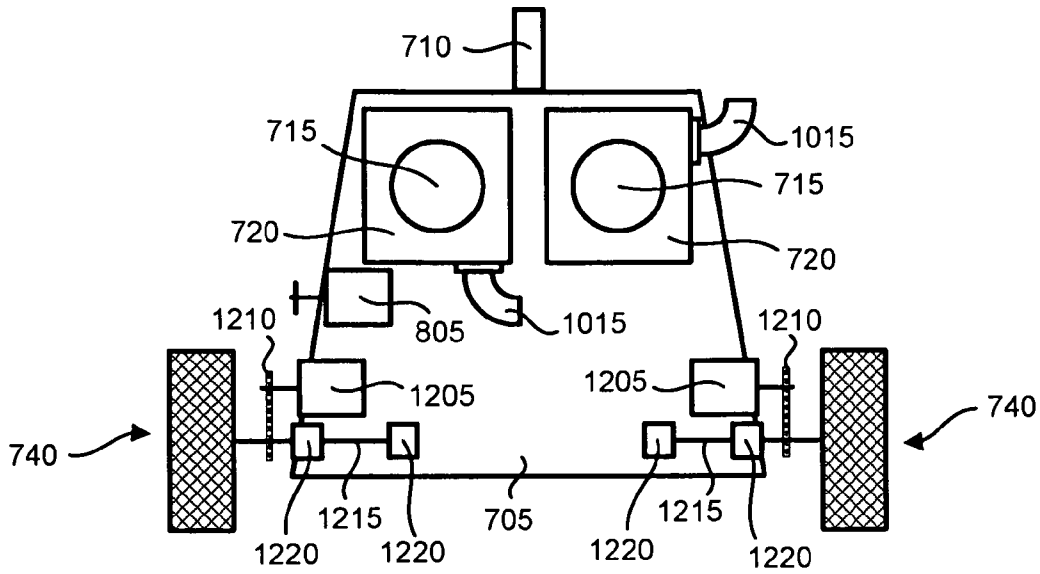


FIG. 12

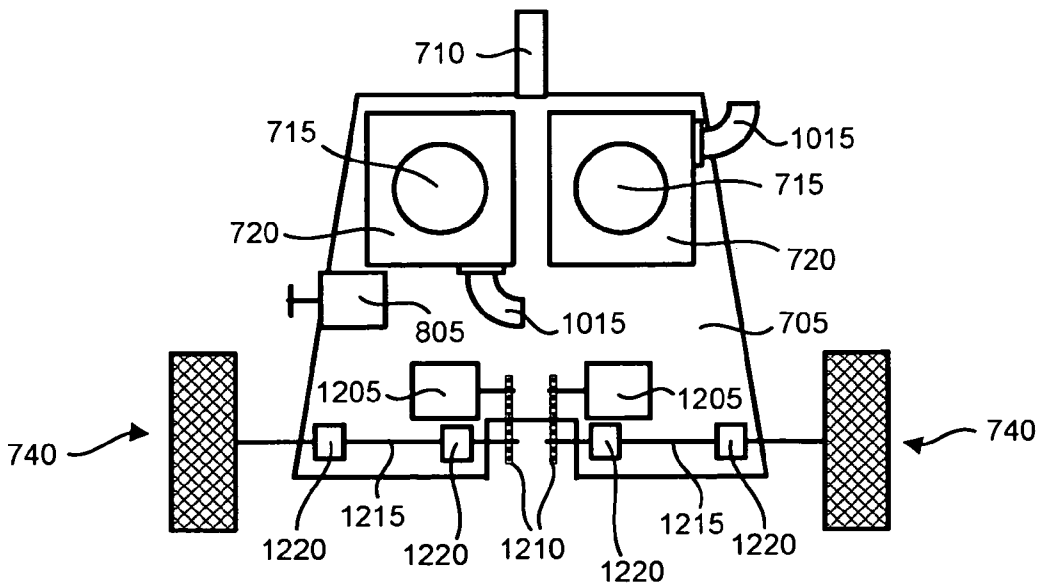


FIG. 13

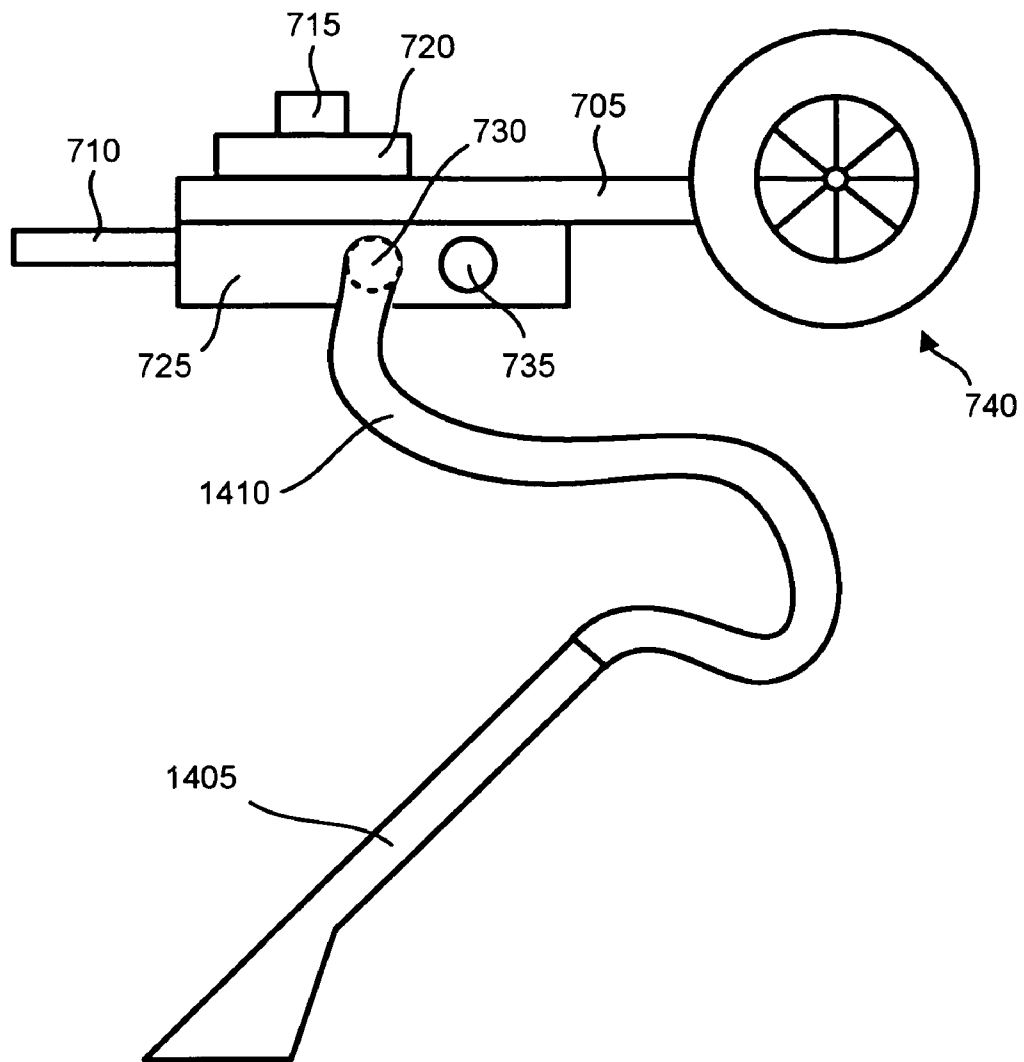


FIG. 14

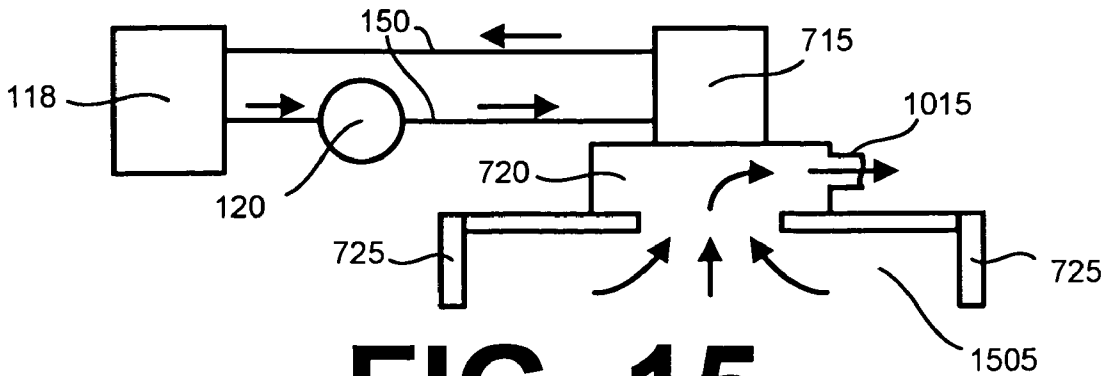


FIG. 15

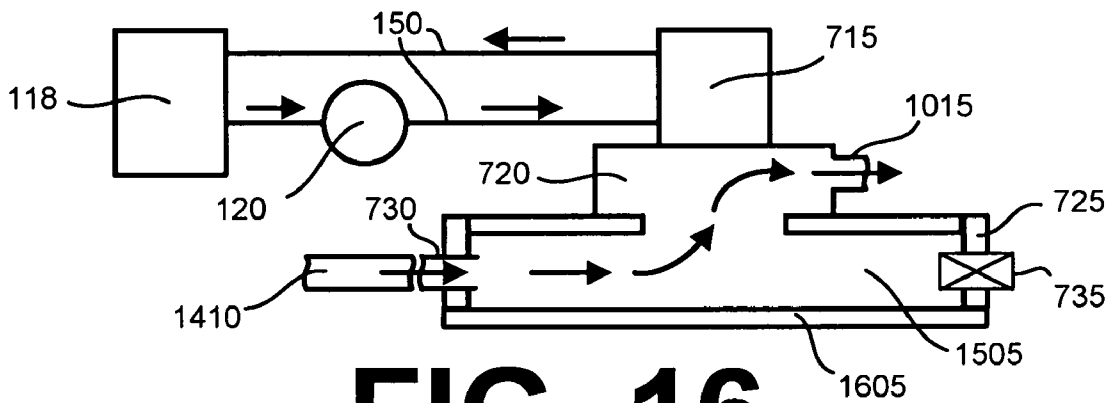


FIG. 16

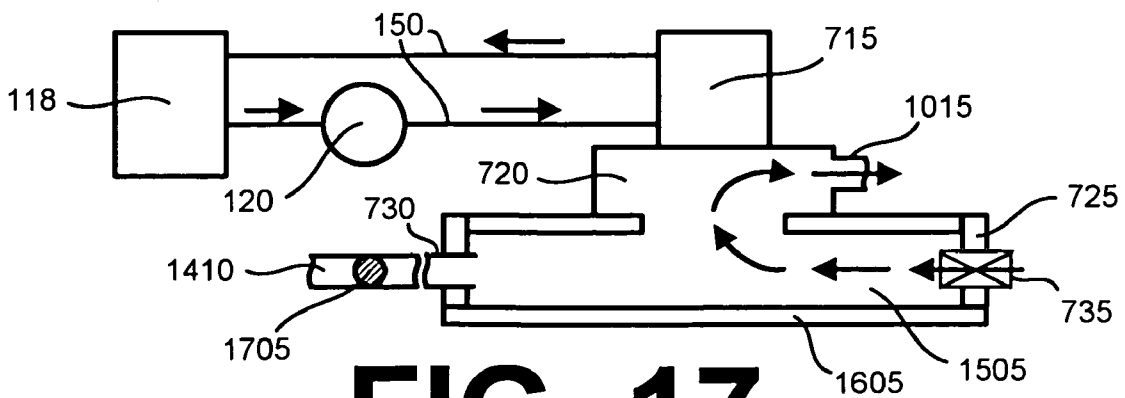


FIG. 17

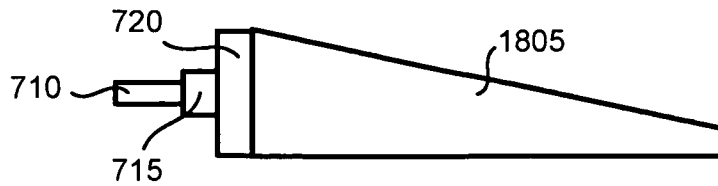


FIG. 18A

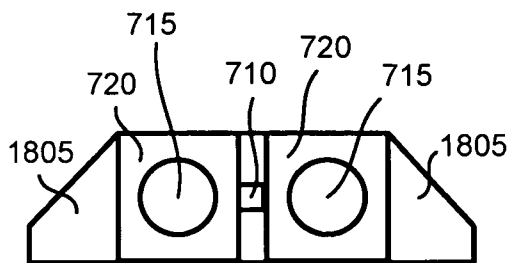


FIG. 18B

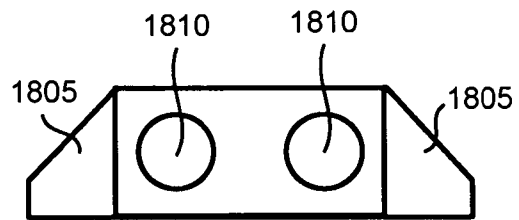


FIG. 18C

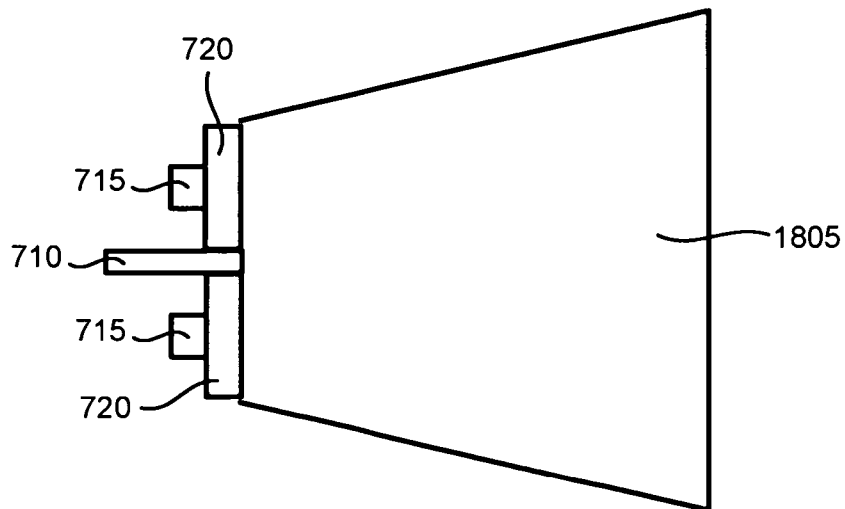


FIG. 18D

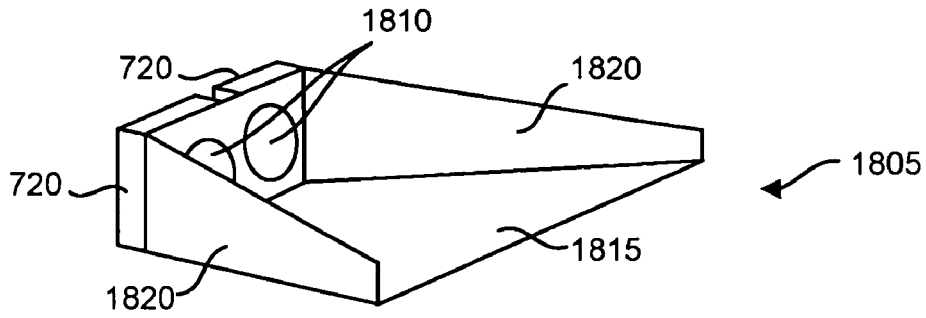


FIG. 18E

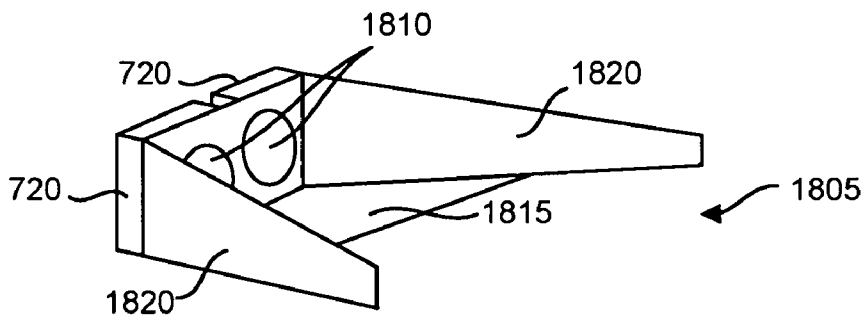


FIG. 19

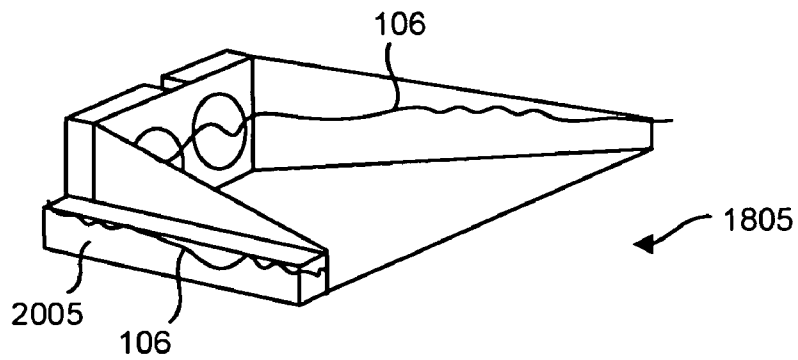


FIG. 20

DREDGING APPARATUS

BACKGROUND

1. Field of the Invention

The invention relates generally to a dredging apparatus, and more specifically, but without limitation, to a dredging apparatus having a submersible head assembly that is configured to remove sludge and/or other matter from a waterway.

2. Description of the Related Art

Dredging is the process of removing bottom sediments or other matter from a body of water. Dredging may be performed in seas or in fresh water, for instance to improve navigation, for mining purposes, and/or for the remediation of contaminated waters.

Conventional dredging equipment is not effective in all conditions and applications, however. For example, most conventional dredges are configured to harshly scrape the bed of the waterway. This may be undesirable where fragile aquatic ecosystems could be damaged.

In addition, conventional dredging equipment that is adapted to remove sand or other sediments often suffer from clogged suction pumps and/or discharge lines in canals or other environments that contain a large amount of sludge. This is because sludge is more viscous than slurries of sand. Similar problems can arise when invasive plant life, trash, or other debris is being removed from a waterway.

Moreover, it is sometimes necessary to perform dredging operations in very shallow waters. For instance, it may be desirable to dredge at the edge of a lake, or in a shallow stream or pond. Target areas may also include obstacles such as docks, piers, or large boulders. Conventional dredging equipment generally cannot operate in such environments because the dredging boats cannot navigate in very shallow waters or through narrow passages.

For these and other reasons, improved dredging equipment is needed.

SUMMARY OF THE INVENTION

Embodiments of the invention seek to address one or more of the shortcomings described above with respect to conventional dredging equipment. In embodiments of the invention, a dredging head assembly uses vacuum only, or a combination of vacuum and flexible PVC tines, rather than the harsh digging and/or scraping features of conventional dredging equipment. Embodiments of the invention also provide a dredging head assembly that may be used in very shallow water. An embodiment of the invention includes a hose and wand to enable vacuuming around obstacles. One variant of the dredging head assembly is adapted for skimming floating debris from the surface of a body of water.

More specifically, one embodiment of the invention provides a dredging apparatus. The dredging apparatus includes: a hull; a boom coupled to the hull adjacent to an aft end of the boom; a winch coupled to the hull; a mast movably coupled to the boom and movably coupled to the hull, the mast having a pulley; a cable coupled to the winch, movably coupled to the pulley, and further coupled adjacent to a fore end of the boom; and a ram coupled to the hull and the boom, the dredging apparatus thus configured to raise and lower the boom using at least one of the winch and the ram.

Another embodiment of the invention provides a dredging head assembly. The dredging head assembly includes: a

frame; a suction pump coupled to the frame; a hydraulic motor coupled to drive the suction pump; and a wheel assembly coupled to the frame.

BRIEF DESCRIPTION OF THE DRAWINGS

The invention will be more fully understood from the detailed description below and the accompanying drawings, wherein:

FIG. 1 is an elevation view of a dredging apparatus, according to an embodiment of the invention;

FIG. 2 is an elevation view of the dredging boat illustrated in FIG. 1;

FIG. 3 is an elevation view of the dredging boat illustrated in FIG. 1;

FIG. 4 is an elevation view of the dredging boat illustrated in FIG. 1;

FIG. 5 is an elevation view of the dredging boat illustrated in FIG. 1;

FIG. 6 is a plan view of a hydraulic fluid pumping system, according to an embodiment of the invention;

FIG. 7 is an elevation view of a dredging head assembly, according to an embodiment of the invention;

FIG. 8 is an elevation view of a dredging head assembly, according to an embodiment of the invention;

FIG. 9 is a front elevation view of the dredging head assembly in FIG. 8;

FIG. 10 is a plan view of a dredging head assembly, according to an embodiment of the invention;

FIG. 11 is a plan view of a dredging head assembly, according to an embodiment of the invention;

FIG. 12 is a plan view of a dredging head assembly, according to an embodiment of the invention;

FIG. 13 is a plan view of a dredging head assembly, according to an embodiment of the invention;

FIG. 14 is an elevation view of a dredging head assembly, according to an embodiment of the invention;

FIG. 15 is a fluid flow diagram of a dredging head assembly, according to embodiments of the invention;

FIG. 16 is a fluid flow diagram for the dredging head assembly in FIG. 14;

FIG. 17 is a fluid flow diagram for the dredging head assembly in FIG. 14;

FIG. 18A is a side elevation view of a skimmer dredging head assembly, according to an embodiment of the invention;

FIG. 18B is a rear elevation view of the skimmer dredging head assembly in FIG. 18A;

FIG. 18C is a front elevation view of the skimmer dredging head assembly in FIG. 18A;

FIG. 18D is a plan view of the skimmer dredging head assembly in FIG. 18A;

FIG. 18E is a perspective view of the skimmer dredging head assembly in FIG. 18A;

FIG. 19 is a perspective view of a skimmer dredging head assembly, according to an embodiment of the invention; and

FIG. 20 is a perspective view of a skimmer dredging head assembly, according to an embodiment of the invention.

DETAILED DESCRIPTION

An embodiment of the invention will now be described more fully with reference to FIGS. 1 through 20. This invention may, however, be embodied in many different forms and should not be construed as limited to the embodiments set forth herein. In the drawings, reference designators may be

duplicated for the same or similar features. The figures are not necessarily drawn to scale; some features may be exaggerated for clarity.

FIG. 1 is an elevation view of a dredging apparatus, according to an embodiment of the invention. As shown therein, a dredging boat 102 is coupled to a dredging head assembly 104. The dredging boat 102 and the dredging head assembly 104 are shown with respect to a water surface 106 and a floor 108. The floor 108 may be, for example, a lake, river, or stream bed.

In the illustrated embodiment, the dredging boat 102 includes a hull 110 that is topped by a lower deck 112. An outboard motor 116 is coupled to the hull 110. A hydraulic oil tank 118, hydraulic pump 120, gear box 122, gas engine 124, and cable winch 128 are mounted to the lower deck 112. The dredging boat 102 further includes an upper deck 114 disposed above the lower deck 112. A chair 126 is disposed on the upper deck 114.

The dredging boat 102 also includes a fore boom section 140 coupled to an aft boom section 144. The aft boom section 144 is further coupled to the hull 110. In addition, the aft boom section 144 is coupled to the hull 110 and/or the lower deck 112 via at least one hydraulic ram 130. As used herein, a ram is a mechanical device that produces pressure. The hydraulic ram 130 preferably produces pressure in two directions. A mast 132 is coupled to the aft boom section 144. The mast 132 is further coupled to the hull 110 via a skid plate 134. The mast 132 includes a pulley 136. A cable 138 is disposed from the cable winch 128 through the pulley 136 and to a forward section of the fore boom section 140. The fore boom section 140 additionally includes a wheel assembly 142 at a very leading edge. The wheel assembly 142 may include, for instance, 12 inch diameter tires.

Hydraulic lines 150 extend from the hydraulic pump 120 to the dredging head assembly 104. The hydraulic lines 150 may pass, for example, within or on the fore boom section 140 and the aft boom section 144. An outlet (discharge) pipe 146 extending from the dredging head assembly 104 may be disposed on the water surface 106 using one or more flotation devices 148.

The hull 110, lower deck 112, upper deck 114, and/or other components of the dredging boat 102 may be fabricated from aluminum to achieve a light weight and a shallow draft with respect to the water surface 106.

Variations to the configuration illustrated in FIG. 1 are possible. For instance, the placement of the hydraulic oil tank 118, hydraulic pump 120, gas engine 124, chair 126, and other components can be varied according to design choice. Multiple outboard motors 116 could be used. In addition, there are many variations with respect to the configuration of the dredging head assembly 104 that are described below with reference to FIGS. 7-20.

In operation, the dredging boat 102 moves the dredging head assembly 104 within a target dredging area using the outboard motor 116. In an alternative embodiment described with reference to FIGS. 12 and 13 below, the head assembly 104 may be self-propelled. In this instance, the outboard motor 116 may not be required during dredging operations, except perhaps to transport the dredging boat 102 and the dredging head assembly 104 to the target dredging area.

As illustrated in FIG. 1, the dredging head assembly 104 may be fully or partially submerged below the water surface 106 during operation. The fore boom section 140 permits the dredging head assembly 104 to roll on the floor 108, even in very shallow water.

FIGS. 2-5 show exemplary relative positions of the mast 132, fore boom section 140 and aft boom section 144 on the dredging boat 102.

FIG. 2 is an elevation view of the dredging boat illustrated in FIG. 1. In the configuration illustrated in FIG. 2, the fore boom section 140 is shown in a raised position. FIG. 2 also illustrates that the fore boom section 140 may be coupled to the aft boom section 144 at a fore boom pivot joint 205. Locking bars 210 may be used to limit the rotational position of the fore boom section 140 with respect to the aft boom section 144 (as illustrated in FIGS. 4 and 5). In operation, the fore boom section 140 may be moved to the illustrated raised position by retracting a relatively large amount of the cable 138 using the cable winch 128.

FIG. 3 is an elevation view of the dredging boat illustrated in FIG. 1. As shown in FIG. 3, in a second position, the aft boom section 144 may be rotated about the aft boom pivot joint 305. In operation, the rotational position of the aft boom section 144 is controlled using the hydraulic ram 130. For instance, to transition from the position shown in FIG. 2 to the position shown in FIG. 3, the hydraulic ram 130 is compressed.

FIG. 4 is an elevation view of the dredging boat illustrated in FIG. 1. As illustrated in FIG. 4, the fore boom section 140 may be placed in a lowered position. In the illustrated configuration, the fore boom section 140 is coupled to the aft boom section 144 via fore boom pivot joint 205. The locking bars 210 prevent the fore boom section 140 from overextending with respect to the aft boom section 144. To extend the fore boom section 140, for instance from the position shown in FIG. 2 to the position shown in FIG. 4, the cable winch 128 releases an additional length of cable 138.

FIG. 5 is an elevation view of the dredging boat illustrated in FIG. 1. As illustrated in FIG. 5, the fore boom section 140 may be disposed in a lowered position and the aft boom section 144 may be disposed in a horizontal position. To transition from the position shown in FIG. 4 to the position shown in FIG. 5, the hydraulic ram 130 is compressed and a relatively small amount of cable 138 is retracted by the cable winch 128.

FIG. 6 is a plan view of a hydraulic fluid pumping system, according to an embodiment of the invention. As shown therein, the gas engine 124 is coupled to the hydraulic pump 120 via a gear box 122. The gas engine 124 may be or include, for instance, a conventional 4-cylinder or 6-cylinder engine. The gear box 122 includes a centrifugal clutch assembly 610. The gear box 122 may provide mechanical support for a rear portion of the engine 124. The gear box 122 may be oil-cooled. A drive shaft 605 couples the gas engine 124 to the centrifugal clutch assembly 610.

The centrifugal clutch assembly 610 is also coupled to a driven shaft 615. A first gear (sprocket) 625 is affixed to the driven shaft 615. The driven shaft 615 terminates at a carrier bearing assembly 620. The carrier bearing assembly 620 may be or include, for example, a pillow block bearing. The hydraulic pump 120 includes a hydraulic pump shaft 640 that has a second gear (sprocket) 635 affixed. A chain 630 is coupled between the first gear 625 and the second gear 635. The chain 630 may be, for example, an American National Standards Institute (ANSI) no. 60 roller chain. The first gear 625 and the second gear 635 need not have the same dimensions. For instance, the first gear 625 may be a 12-tooth gear, and the second gear 635 may be a 24-tooth gear. Other gearing could be used to achieve a desired gear ratio.

In operation, the gas engine 124 rotates the drive shaft 605. When the drive shaft 605 reaches a predetermined rotational speed (e.g., 1500 rpm), the centrifugal clutch assembly 610

5

engages the driven shaft **615**. In turn, the driven shaft **615** rotates the hydraulic pump shaft **640** via the chain **630**. The application of the centrifugal clutch assembly **610** may be advantageous because the load of the hydraulic pump **120** is not present when the gas engine **124** is started. The hydraulic pump **120** operates so long as the drive shaft **605** exceeds the predetermined rotational speed.

Variations to the configuration illustrated in FIG. **6** and described above are possible. For instance, the gas engine **124** could be replaced by a diesel-powered engine, a steam-powered engine, or another type of prime mover, according to design choice. In an alternative embodiment, the chain **630**, first gear **625**, and second gear **635** could be replaced by a drive shaft, belt and pulley system, or other means of power transmission.

FIG. **7** is an elevation view of a dredging head assembly, according to an embodiment of the invention. The dredging head assembly illustrated in FIG. **7** may be, for instance, the dredging head assembly **104** that is shown in FIG. **1**. The illustrated dredging head assembly **104** includes a head frame **705**. A head coupling **710** is attached to the head frame **705**. The head coupling **710** is configured to couple the dredging head assembly **104** to the dredging boat **102**.

The illustrated dredging head assembly **104** further includes a hydraulic motor **715** that drives a suction pump **720**. The suction pump **720** may have the capacity, for instance, to pump 900 gallons per minute (GPM). In addition, the dredging head assembly **104** that is illustrated in FIG. **7** includes a vacuum port **730** and a pressure relief valve **735** coupled to an intake wall **725**. A forward portion of the dredging head assembly **104** includes a wheel assembly **740**. The wheel assembly **740** includes a wheel **750** disposed on an axle **755**. The wheel **750** is fitted with a tire **745**. The tire **745** may be, for example, 22 inches in diameter.

Variations to the configuration illustrated in FIG. **7** and described above are possible. For instance, the vacuum port **730** and pressure relief valve **735** are each optional features. In alternative embodiments, there may be multiple suction pumps **720**, each having an associated hydraulic motor **715**. 2-pump and 3-pump variants are expressly described below. There may be more than one wheel assemblies **740** for each dredging head assembly **104**.

FIG. **8** is an elevation view of a dredging head assembly, according to another embodiment of the invention. As illustrated in FIG. **8**, the dredging head assembly **104** may further include a beater bar motor **805**. The beater bar motor **805** may be variable speed, and may be capable of both forward and reverse operation. A first sprocket **820** is affixed to a shaft of the beater bar motor **805**. A second sprocket **825** is affixed to a beater bar (not shown in FIG. **8**). A roller chain **810** is coupled between the first sprocket **820** and the second sprocket **825**. Tines **815** are coupled to the beater bar. The tines **815** may be fabricated, for instance, from hollow, flexible, $\frac{5}{8}$ inch diameter, polyvinyl chloride (PVC). In operation, the beater bar motor **805** rotates the tines **815** to soften the floor **108**.

FIG. **9** is a front elevation view of the dredging head assembly in FIG. **8**. As illustrated in FIG. **9**, the dredging head assembly **104** may include two suction pumps **720**, each driven by a corresponding hydraulic motor **715**. FIG. **9** further illustrates that the tines **815** are attached to a beater bar **905**. The beater bar **905** may be, for example, a $\frac{1}{4}$ inch diameter steel rod. To support the beater bar **905**, the dredging head assembly **104** may further include a carrier bearing assembly **910** at or near each end of the beater bar **905**. The carrier bearing assemblies **910** may be or include, for example, a pillow block bearing. In the embodiment illus-

6

trated in FIG. **9**, each of two wheel assemblies **740** are coupled to the head frame **705** via a corresponding axle **755**.

Variations to the embodiment illustrated in FIGS. **8** and **9** are possible. For instance, the dredging head assembly **104** may include a single suction pump **720** and associated hydraulic motor **715**. In other embodiments, the dredging head assembly **104** may include more than two suction pumps **720** and associated hydraulic motors **715**. In addition, there may be a fewer or greater number of tines **815** affixed to the beater bar **905**, according to design choice. In an alternative embodiment, the roller chain **810**, first sprocket **820**, and second sprocket **825** could be replaced by a drive shaft, belt and pulley system, or other means of power transmission. The two axles **755** could be replaced by a single continuous axle that supports the two wheel assemblies **740**.

FIG. **10** is a plan view of a dredging head assembly, according to an embodiment of the invention. As shown therein, the dredging head assembly **104** is coupled to a fore boom section **140** via a boom coupling **1010**. The boom coupling **1010** may be configured, for example, to pivot where the boom coupling **1010** communicates with frame members **1020**. Only a portion of the fore boom section **140** is shown in FIG. **10**. The fore boom section **140** includes a plank **1025**. The fore boom section **140** also has two wheel assemblies **142** that are disposed on a boom axle **1005**. The dredging head assembly **104** shown in FIG. **10** includes two suction pumps **720**, each being driven by an associated hydraulic motor **715**. Each of the suction pumps **720** has an outlet port **1015**. The outlet ports **1015** may be, for instance, 4 inches in diameter.

Embodiments with 900 GPM suction pumps **720** and 4 inch diameter outlet ports **1015** will resist clogging in many dredging environments.

FIG. **11** is a plan view of a dredging head assembly, according to an embodiment of the invention. As shown therein, an alternative embodiment of the dredging head assembly **104** includes three suction pumps **720**, each of the suction pumps **720** being driven by a corresponding hydraulic motor **715**.

The embodiments illustrated in FIGS. **12** and **13** and discussed below present two exemplary alternatives for a self-propelled dredging head assembly. The self-propelled dredging head assembly may eliminate the need for operation of the outboard motor **116** during dredging operations. This may be advantageous because the outboard motor **116** can create undesirable turbulence.

FIG. **12** is a plan view of a dredging head assembly, according to an embodiment of the invention. As shown therein, the dredging head assembly **104** includes two drive motors **1205**, each coupled to a corresponding drive shaft **1215** via a roller chain **1210** and sprockets (not shown). Each of the drive shafts **1215** may also be coupled to one or more carrier bearing assemblies **1220**. The carrier bearing assemblies **1220** may be or include, for example, a pillow block bearing. The drive motors **1205** may be variable speed, and may have forward and reverse capability. In operation, the drive motors **1205** can be used to propel the dredging head assembly **104**. In addition, differential steering can be accomplished by changing the rate of one drive motor **1205** with respect to the other.

FIG. **13** is a plan view of a dredging head assembly, according to an embodiment of the invention. The dredging head assembly **104** may also include drive motors **1205** coupled to drive shafts **1215** via roller chains **1210** and sprockets (not shown). In the embodiment illustrated in FIG. **13**, however, the drive motors **1205** are disposed near a center portion of the head frame **705**.

FIG. **14** is an elevation view of a dredging head assembly, according to an embodiment of the invention. In the illus-

trated embodiment, a flexible vacuum hose **1410** is coupled to an intake wall **725**. The flexible vacuum hose **1410** may be, for example, 2 inches in diameter and 30 foot in length. A rigid wand **1405** may be coupled to an opposite end of the flexible vacuum hose **1410**. In operation, the suction pump **720** creates a vacuum within the dredging head assembly **104** and further allows suction at the rigid wand **1405**. An advantage of an embodiment that includes the flexible vacuum hose **1410** and rigid wand **1405** is that a human operator can easily vacuum around docks, large rocks, or other obstacles. Certain features of this embodiment are further described with respect to FIGS. **16** and **17** below.

FIG. **15** is a fluid flow diagram of a dredging head assembly, according to embodiments of the invention. As shown therein, the hydraulic pump **120** is configured to transfer oil from the hydraulic oil tank **118** to the hydraulic motor **715** via the hydraulic lines **150**. The hydraulic lines **150** are also coupled to return oil from the hydraulic motor **715** to the hydraulic oil tank **118** on a return path. The hydraulic motor **715** drives the suction pump **720**. An input port of the suction pump **720** is surrounded by an intake wall **725**. The intake wall **725** forms an intake chamber **1505**. During operation of the suction pump **720**, water and particulates enter the intake chamber **1505**, flow through the suction pump **720**, and are expelled from the outlet port **1015**. In alternative embodiments, the hydraulic pump **120** may drive multiple hydraulic motors **715**.

FIG. **16** is a fluid flow diagram for the dredging head assembly in FIG. **14**. As shown therein, the hydraulic pump **120** is configured to transfer oil from the hydraulic oil tank **118** to the hydraulic motor **715** via the hydraulic lines **150**. The hydraulic lines **150** are also coupled to return oil from the hydraulic motor **715** to the hydraulic oil tank **118** on a return path. The hydraulic motor **715** drives the suction pump **720**.

As also illustrated in FIG. **16**, the intake chamber **1505** may be fully enclosed with the addition of the pan **1605**. The vacuum hose **1410** is coupled to the vacuum port **730** in a portion of the intake wall **725**. Fluid received into the vacuum hose **1410** flows through the intake chamber **1505** and the suction pump **720**, and is expelled through the outlet port **1015**.

FIG. **17** is a fluid flow diagram for the dredging head assembly in FIG. **14**. As shown therein, the hydraulic pump **120** is configured to transfer oil from the hydraulic oil tank **118** to the hydraulic motor **715** via the hydraulic lines **150**. The hydraulic lines **150** are also coupled to return oil from the hydraulic motor **715** to the hydraulic oil tank **118** on a return path. The hydraulic motor **715** drives the suction pump **720**.

As also illustrated in FIG. **17**, a pressure relief valve **735** is disposed in the intake wall **725**. In the illustrated condition, the vacuum hose **1410** is at least partially clogged with an obstruction **1705** that restricts fluid flow through the vacuum port **730**. When the intake chamber **1505** reaches a predetermined negative pressure, the pressure relief valve **735** opens. This allows fluid to flow through the pressure relief valve **735**, through the suction pump **720**, and out the outlet port **1015**.

FIG. **18A** is a side elevation view of a skimmer dredging head assembly, according to an embodiment of the invention. As shown therein, a channel **1805** is coupled to a suction pump **720**. The channel **1805** may be fabricated, for example, from a $\frac{3}{8}$ inch thick sheet of aluminum. A hydraulic motor **715** drives the suction pump **720**. The dredging head assembly illustrated in FIG. **18A** can be coupled to, for example, the fore boom section **140** via the head coupling **710**. The fore boom section **140** may suspend the skimmer dredging assembly at or near the water surface **106**.

FIG. **18B** is a rear elevation view of the skimmer dredging head assembly in FIG. **18A**. FIG. **18B** reveals that the skimmer dredging head assembly may include two suction pumps **720**, each driven by a corresponding hydraulic motor **715**. FIG. **18C** is a front elevation view of the skimmer dredging head assembly in FIG. **18A**. The frontal view shows two suction pump inlet ports **1810**. In use, a plane that includes the mouth of the suction pump inlet ports **1810** is disposed at approximately 90 degrees with respect to a plane of the water surface **106**. FIG. **18D** is a plan view of the skimmer dredging head assembly in FIG. **18A**. As shown in FIG. **18D**, a footprint of the channel **1805** may be an isosceles trapezoid. FIG. **18E** is a perspective view of the skimmer dredging head assembly in FIG. **18A**. As illustrated in FIG. **18E**, a channel floor **1815** may extend to the end of the channel walls **1820**. A plane that includes the mouth of the suction pump inlet ports **1810** is disposed at approximately 90 degrees with respect to the channel floor **1815**. In use, a plane that includes the channel floor **1810** is disposed approximately parallel to a plane that includes that water surface **106**.

FIG. **19** is a perspective view of a skimmer dredging head assembly, according to an embodiment of the invention. The skimmer assembly in FIG. **19** includes a channel **1805** with channel walls **1820** that extend beyond the channel floor **1815**.

FIG. **20** is a perspective view of a skimmer dredging head assembly, according to an embodiment of the invention. As illustrated therein, a flotation feature **2005** coupled to the channel **1805** may be used to dispose the skimmer dredge head assembly at a predetermined elevation and attitude with respect to the water surface **106**.

It will be apparent to those skilled in the art that modifications and variations can be made without deviating from the spirit or scope of the invention. For example, alternative features described herein could be combined in ways not explicitly illustrated or disclosed. Thus, it is intended that the present invention cover any such modifications and variations of this invention provided they come within the scope of the appended claims and their equivalents.

I claim:

1. A dredging apparatus comprising:

- a hull;
- a boom coupled to the hull adjacent to an aft end of the boom;
- a winch coupled to the hull;
- a mast movably coupled to the boom and movably coupled to the hull, the mast having a pulley;
- a cable coupled to the winch, movably coupled to the pulley, and further coupled adjacent to a fore end of the boom; and
- a ram coupled to the hull and the boom, the dredging apparatus thus configured to raise and lower the boom using at least one of the winch and the ram.

2. The dredging apparatus of claim 1, wherein the hull includes at least one pontoon.

3. The dredging apparatus of claim 1, wherein the boom is movably coupled to the hull adjacent to the aft end of the boom via a first pivot joint.

4. The dredging apparatus of claim 3, wherein the boom includes a second pivot joint, the second pivot joint being disposed between a point where the mast is coupled to the boom and the fore end of the boom.

5. The dredging apparatus of claim 3, wherein the boom includes a second pivot joint, the second pivot joint including a lock configured to prevent an angle between a fore boom section and an aft boom section from exceeding 180 degrees.

9

6. The dredging apparatus of claim 1, wherein the mast is movably coupled to the hull via a skid plate.

7. The dredging apparatus of claim 1, further comprising a wheel assembly affixed to the boom at a location adjacent to the fore end of the boom.

8. The dredging apparatus of claim 1, further comprising a dredging head assembly coupled to the fore end of the boom, the dredging head assembly including at least one suction pump.

9. The dredging apparatus of claim 8, the dredging head assembly further including at least one hydraulic motor coupled to the at least one suction pump.

10. The dredging apparatus of claim 9, further comprising: an engine coupled to the hull; and a hydraulic pump coupled to the hull, the engine, and the at least one hydraulic motor.

11. The dredging apparatus of claim 10, further comprising a gear box coupled between the engine and the hydraulic pump, the gear box including a centrifugal clutch such that the engine drives the hydraulic pump only above a predetermined rotational speed.

12. The dredging apparatus of claim 8, the dredging head assembly further including a beater bar assembly, the beater bar assembly having:

- a beater bar motor;
- a beater bar coupled to the beater bar motor; and
- a plurality of flexible tines, each of the plurality of flexible tines coupled to the beater bar, the beater bar assembly configured such that when the beater bar motor is activated, the beater bar rotates about its longitudinal axis.

13. The dredging apparatus of claim 8, the dredging head assembly further including:

- an intake wall coupled to the suction pump;
- a vacuum port disposed in the intake wall;
- a vacuum hose configured to couple to the vacuum port; and
- a removable pan configured to couple to the intake wall, the dredging head assembly configured to operate in a first

10

mode when the removable pan is coupled to the intake wall and the vacuum hose is coupled to the vacuum port, the dredging head assembly configured to operate in a second mode when the removable pan is not coupled to the intake wall and the vacuum hose is not coupled to the vacuum port.

14. The dredging apparatus of claim 13, the dredging head assembly further including a pressure relief valve coupled to the intake wall, the pressure relief valve configured to open at a predetermined negative pressure.

15. The dredging apparatus of claim 8, the dredging head assembly further including:

- a drive motor;
- a drive shaft; and
- at least one wheel assembly coupled to the drive shaft such that the dredging head assembly is configured to self-propel.

16. A dredging head assembly comprising:

- a frame;
- a suction pump coupled to the frame;
- an intake wall coupled to the suction pump;
- a vacuum port disposed in the intake wall;
- a vacuum hose configured to couple to the vacuum port;
- a pressure relief valve (PRV) disposed in the intake wall, the PRV configured to open at a predetermined negative pressure; and
- a removable pan configured to connect directly to the intake wall, an enclosed intake chamber being formed when the removable an is connected directly to the intake wall, the dredging head assembly configured to operate in a first mode when the removable pan is connected directly to the intake wall and the vacuum hose is coupled to the vacuum port, the dredging head assembly configured to operate in a second mode when the removable pan is not connected directly to the intake wall and the vacuum hose is not coupled to the vacuum port.

* * * * *