



(12) **United States Patent**
Gould et al.

(10) **Patent No.:** **US 9,527,267 B2**
(45) **Date of Patent:** ***Dec. 27, 2016**

(54) **DELIVERY TUBE FOR IRRIGATION AND FERTILIZATION SYSTEM AND METHOD FOR MANUFACTURING SAME**

66/1122 (2013.01); B29C 66/133 (2013.01);
B29C 66/21 (2013.01); B29C 66/232
(2013.01); B29C 66/432 (2013.01); B29C
66/71 (2013.01); B29C 66/712 (2013.01);
B29C 66/7294 (2013.01); B29C 66/73172
(2013.01); B29C 66/83411 (2013.01); B29C
2793/009 (2013.01); B29L 2031/7004
(2013.01); B32B 2307/728 (2013.01); B32B
2325/00 (2013.01); B32B 2386/00 (2013.01);
B32B 2597/00 (2013.01)

(71) Applicant: **Responsive Drip Irrigation, LLC**,
Bradenton, FL (US)

(72) Inventors: **Janice K Gould**, Bradenton, FL (US);
David A Conklin, Bradenton, FL (US)

(73) Assignee: **Responsive Drip Irrigation, LLC**,
Bradenton, FL (US)

(58) **Field of Classification Search**
USPC 405/36
See application file for complete search history.

(*) Notice: Subject to any disclaimer, the term of this
patent is extended or adjusted under 35
U.S.C. 154(b) by 0 days.

This patent is subject to a terminal dis-
claimer.

(56) **References Cited**

U.S. PATENT DOCUMENTS

3,271,223 A 9/1966 Sudo
3,442,740 A 5/1969 David
3,830,067 A 8/1974 Osborn et al.
(Continued)

(21) Appl. No.: **14/625,572**

(22) Filed: **Feb. 18, 2015**

FOREIGN PATENT DOCUMENTS

(65) **Prior Publication Data**

US 2015/0156975 A1 Jun. 11, 2015

AU 2011224135 10/2011
WO 2008103787 8/2008

Related U.S. Application Data

(63) Continuation-in-part of application No. 13/968,447,
filed on Aug. 16, 2013, now Pat. No. 9,309,996.

Primary Examiner — Benjamin Fiorello
Assistant Examiner — Kyle Armstrong
(74) *Attorney, Agent, or Firm* — Law Office of Steven R.
Olsen, PLLC; Steven R. Olsen

(51) **Int. Cl.**

B32B 37/00 (2006.01)
B32B 38/00 (2006.01)
A01G 25/02 (2006.01)
B29C 65/08 (2006.01)
B29C 65/00 (2006.01)

(Continued)


(57) **ABSTRACT**

The invention is directed generally to improvements in
irrigation and fertilization assessment and delivery. More
specifically, embodiments of the invention provide an
improved fluid delivery tube, method to manufacture such
tube, and systems that include such tube. The delivery tube
is beneficial at least because it minimizes the life cycle cost
of a responsive delivery tube.

(52) **U.S. Cl.**

CPC **B32B 37/0076** (2013.01); **B32B 38/0004**
(2013.01); **A01G 25/02** (2013.01); **B29C 65/02**
(2013.01); **B29C 65/08** (2013.01); **B29C**

15 Claims, 8 Drawing Sheets

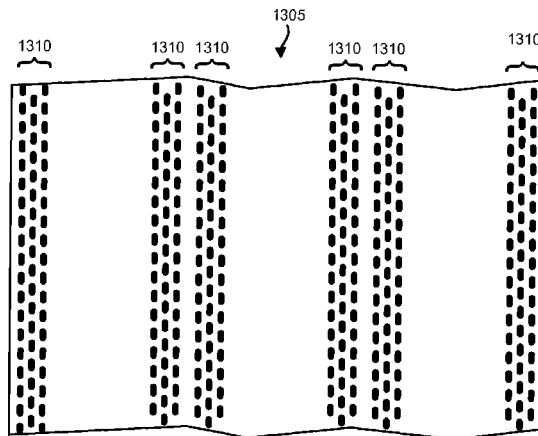

US 9,527,267 B2

Page 2

(51) **Int. Cl.**
 B29C 65/02 (2006.01)
 B29L 31/00 (2006.01)

(56) **References Cited**

 U.S. PATENT DOCUMENTS

3,939,875	A	2/1976	Osborn et al.	8,011,853	B2	9/2011	Gesser et al.
3,945,873	A	3/1976	Osborn	8,091,276	B2	1/2012	Gesser et al.
3,996,968	A *	12/1976	Bergman	8,312,671	B2	11/2012	Sinda
			F16L 11/121	2003/0201345	A1	10/2003	Jeong
			138/103	2006/0193695	A1	8/2006	Ranjan et al.
6,372,096	B1	4/2002	Ditzler	2006/0272726	A1	12/2006	Golan et al.
7,198,431	B2	4/2007	Gesser	2010/0170961	A1	7/2010	Sinda
7,712,253	B2	5/2010	Gesser et al.	2010/0218828	A1	9/2010	Sinda
7,748,930	B2	7/2010	Gesser et al.	2011/0179705	A1	7/2011	Sinda
8,011,852	B2	9/2011	Gesser et al.	2011/0179709	A1	7/2011	Sinda
				2011/0179710	A1	7/2011	Sinda
				2011/0265897	A1	11/2011	Sinda
				2012/0102833	A1	5/2012	Gesser et al.
				2013/0206251	A1*	8/2013	Harr
							F16N 31/006
							137/312
				2014/0047766	A1	2/2014	LaRue et al.

* cited by examiner

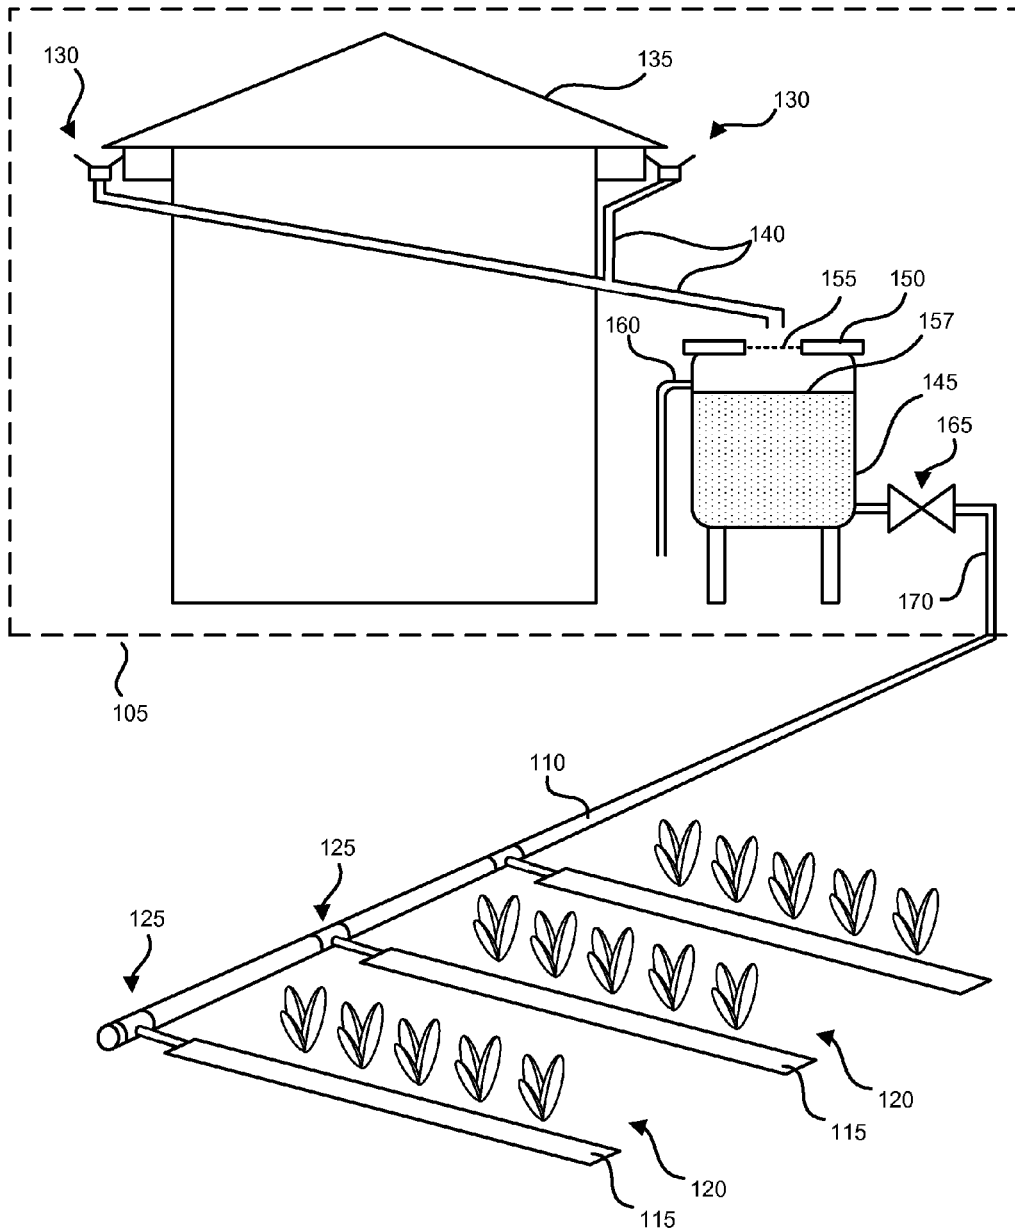


FIG. 1

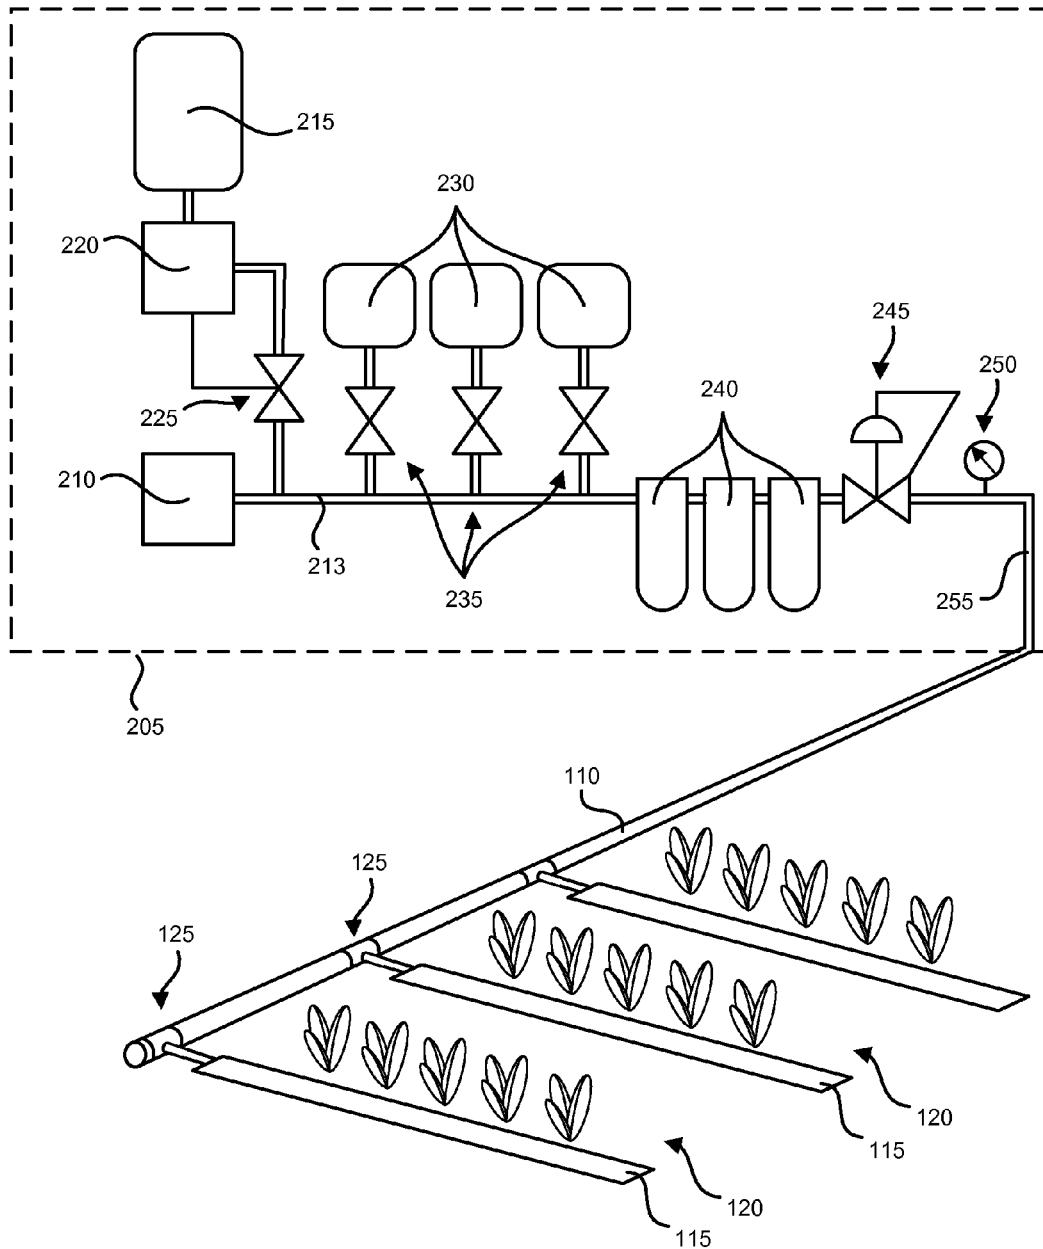


FIG. 2



FIG. 3

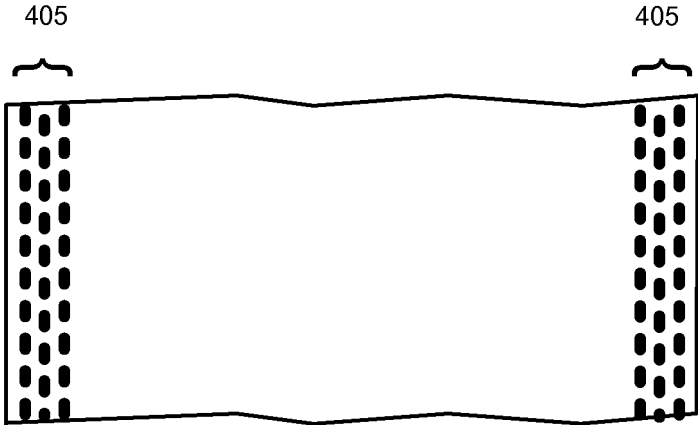


FIG. 4

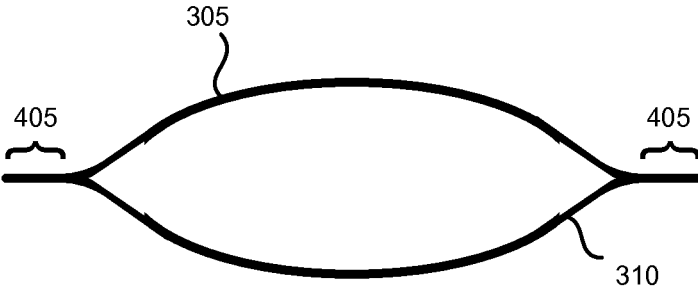


FIG. 5

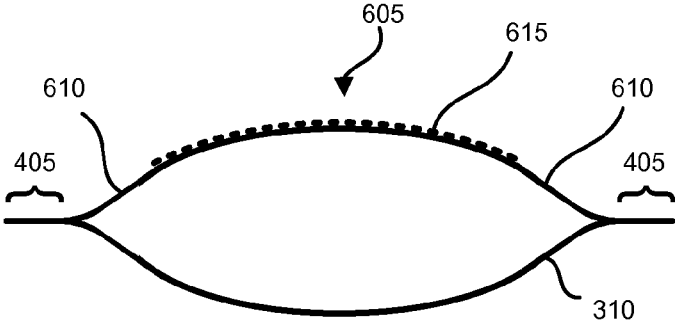


FIG. 6

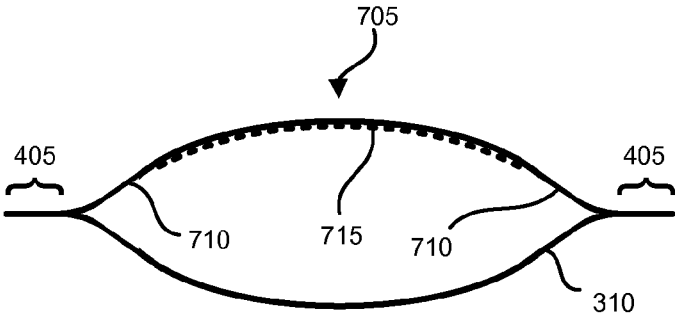


FIG. 7

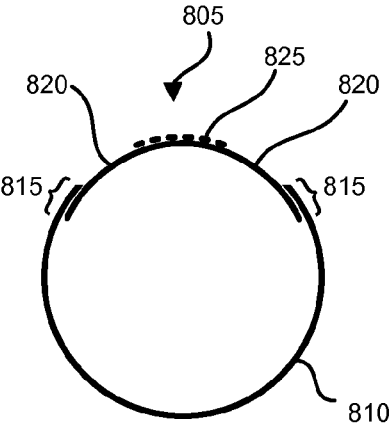


FIG. 8

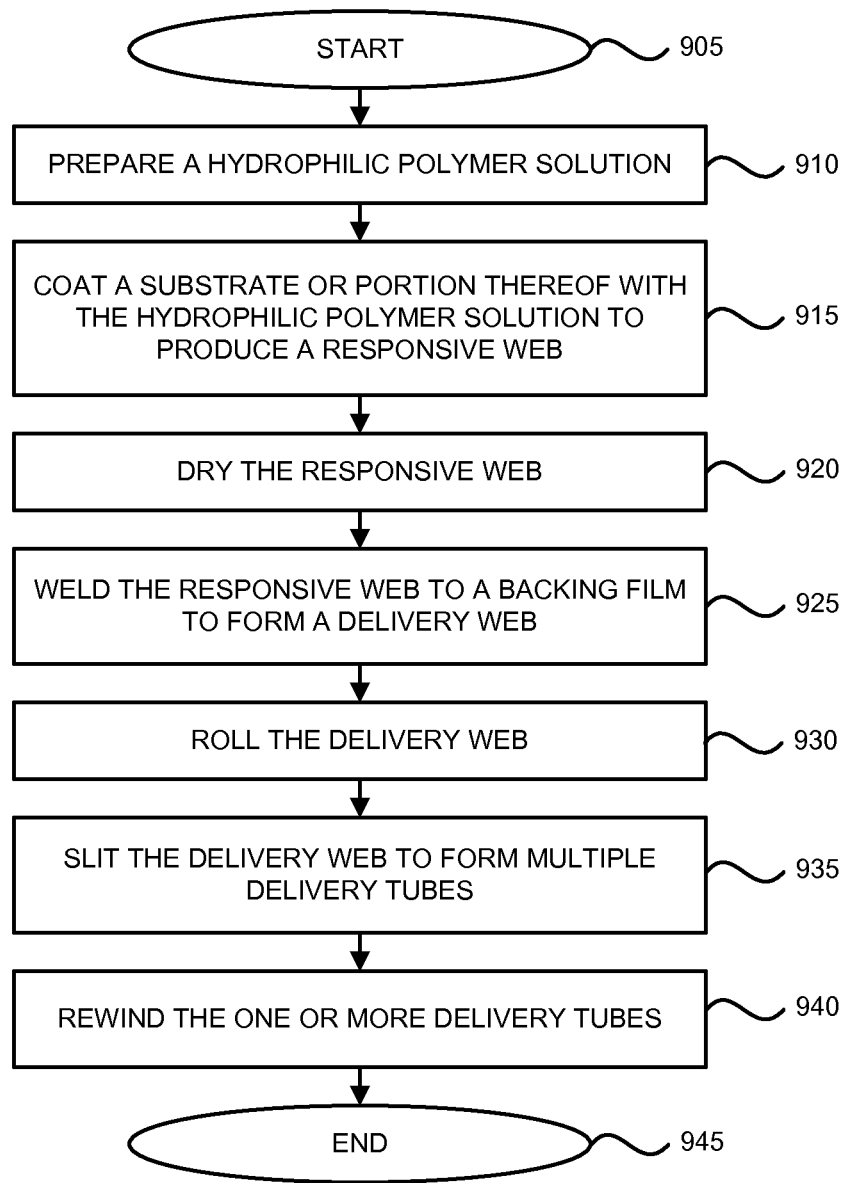


FIG. 9

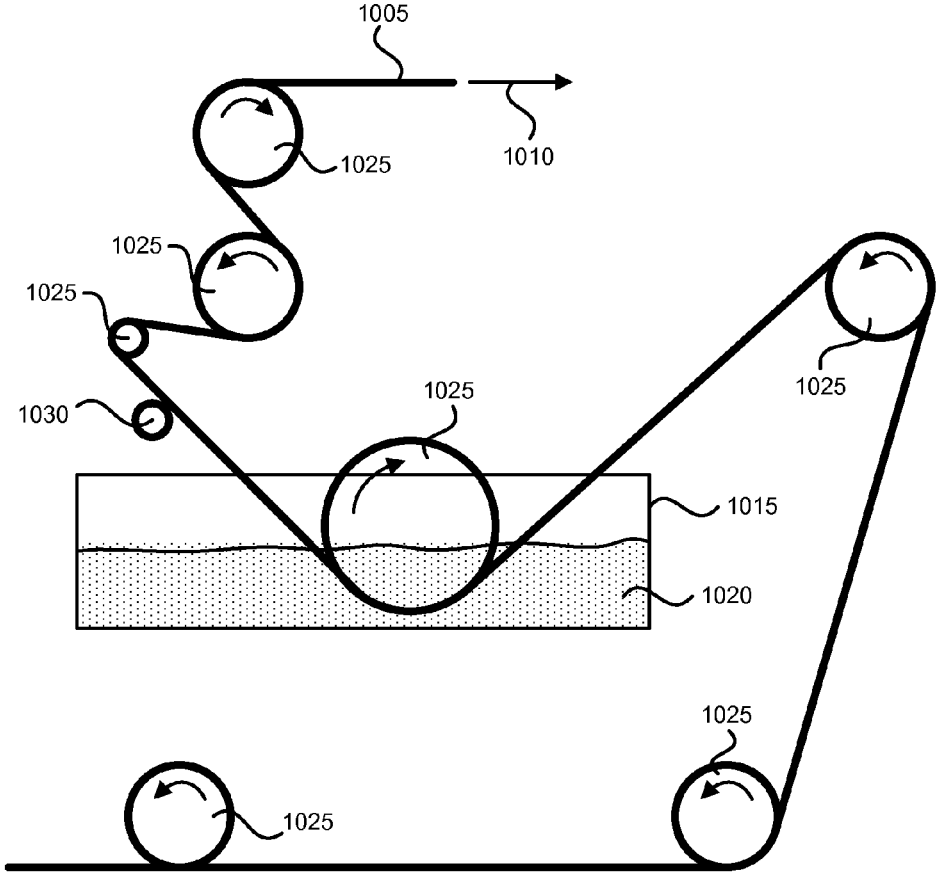


FIG. 10

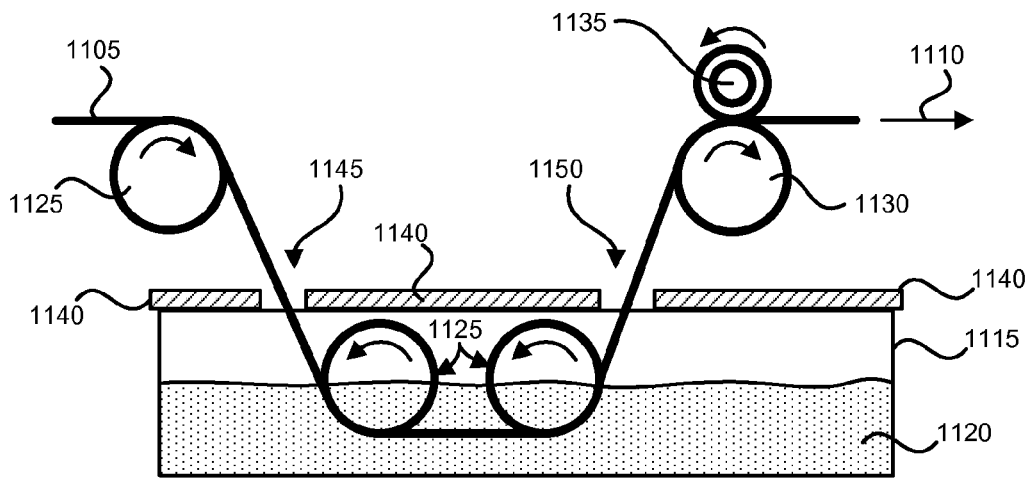


FIG. 11

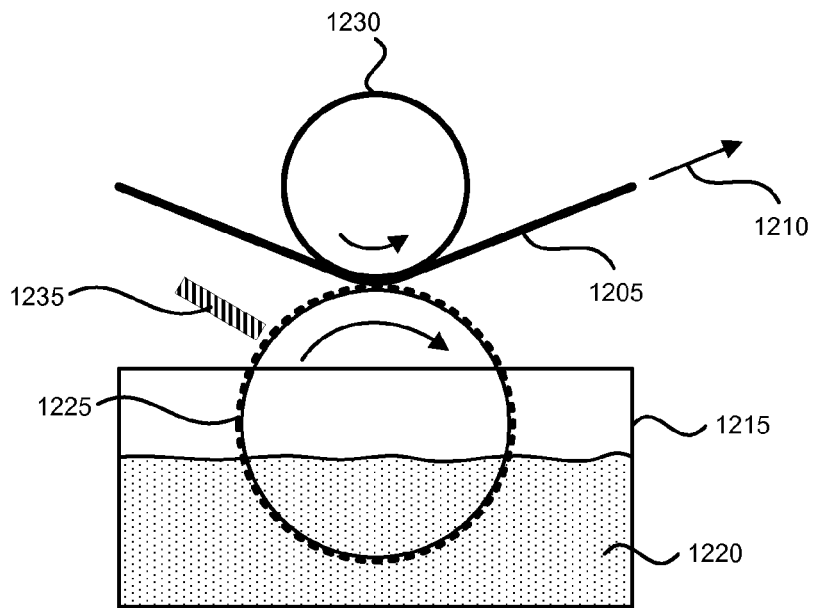


FIG. 12

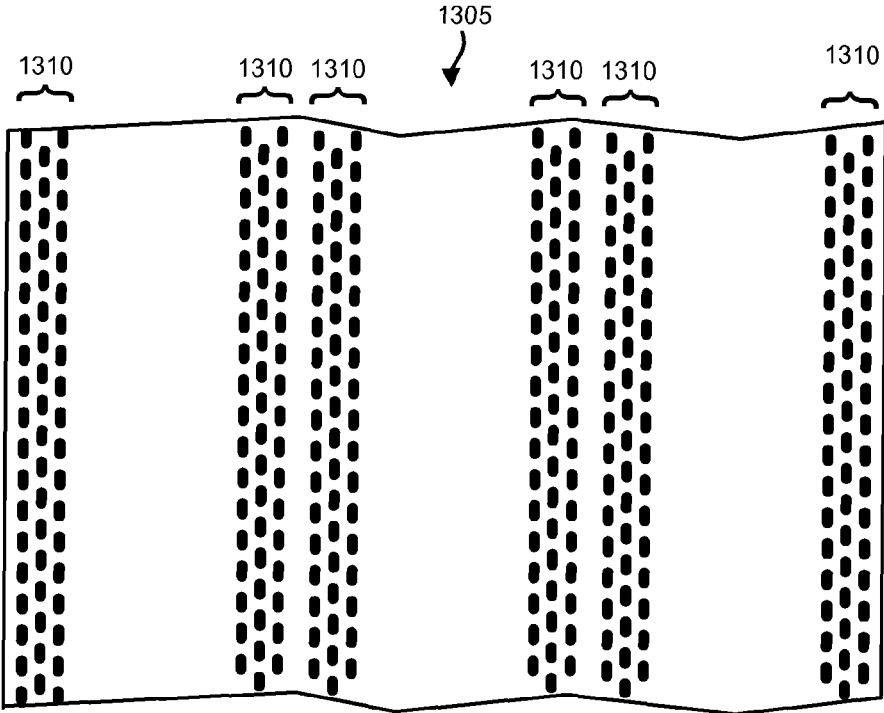


FIG. 13

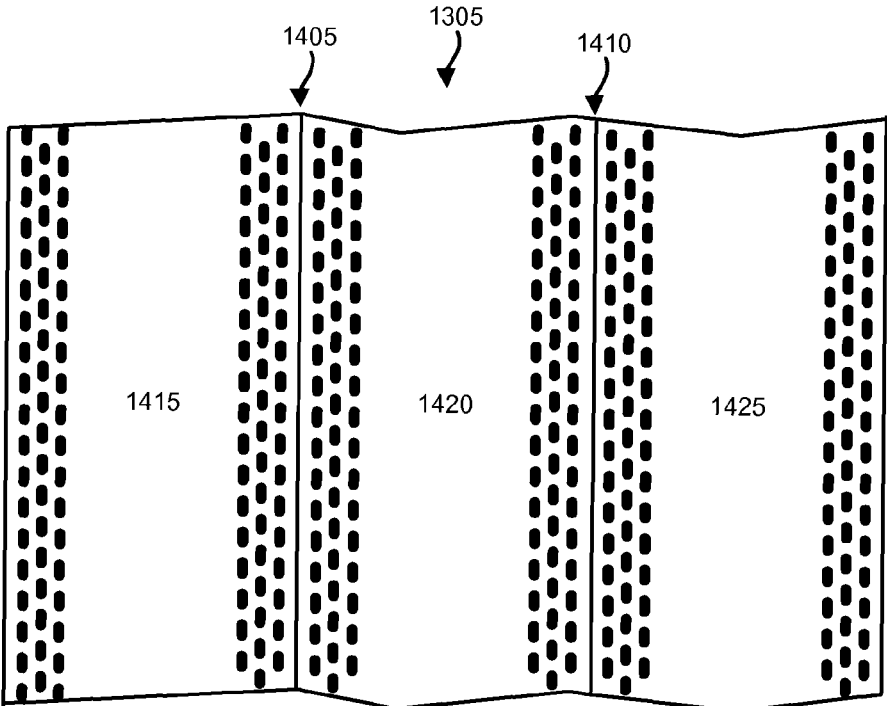


FIG. 14

1

**DELIVERY TUBE FOR IRRIGATION AND
FERTILIZATION SYSTEM AND METHOD
FOR MANUFACTURING SAME**

CROSS-REFERENCE TO RELATED
APPLICATIONS

This is a Continuation-in-Part (CIP) of U.S. application
Ser. No. 13/968,447, which was filed on Aug. 16, 2013.

BACKGROUND

1. Field of the Invention

The invention relates generally to irrigation and fertiliza-
tion systems and methods, and more particularly, but with-
out limitation, to an improved delivery tube that can more-
efficiently satisfy plant hydration and nutrition needs.

2. Description of the Related Art

Agronomic practices include various irrigation and fer-
tilization assessment and delivery methods. Typically, grow-
ers measure environmental conditions (i.e. rainfall, soil
moisture, pH, temperature, etc.) and/or observe plant devel-
opment to determine an amount of water and fertilizer to
apply during a plant's growing season. Well-known methods
also exist for providing the irrigation and fertilization; for
instance, sprinkler systems and drip lines are commonly
utilized.

Conventional assessment methods and delivery systems
have many shortcomings, however. For example, assess-
ment methods that rely on data measurements and observa-
tions to estimate plant needs are reactive. Accordingly, such
methods necessarily introduce a time delay between the
assessment and the delivery of the water and fertilizer.
Sufficiently long delays can stress the target plants and/or
decrease the value of the assessment (since the measured
conditions may quickly change). In addition, such assess-
ments often lack geographical precision, which may be
disadvantageous, for instance, where moisture conditions
vary substantially within a crop field due to changes in
elevation or other factors.

Even if the needs assessment is correct, timely, and
sufficiently precise, conventional irrigation and fertilization
delivery systems often fail to provide the desired level of
water and/or nutrients to each plant. There are many reasons
for this. For example, in an irrigation system, static water
pressure can vary based on distance from the water source,
field topography, and/or leaks or other component failure.
Distributed controls that would overcome such system limi-
tations, and also enable delivery of water and nutrients
according to the demand of each plant, are generally cost
prohibitive. As a result, many delivery systems apply too
little or too much water and nutrients. This decreases crop
yield. The application of too much water is a waste of a
precious natural resource; the application of too much
fertilizer can harm the environment.

Given the importance of food supply, water management,
and the need to protect the environment, improvements in
irrigation and fertilization assessment and delivery methods
are urgently needed.

SUMMARY OF THE INVENTION

Embodiments of the invention seek to overcome one or
more of the aforementioned limitations with an improved
delivery tube, method to manufacture such tube, and/or
systems that include such tube.

2

An embodiment of the invention provides a delivery tube
that includes: a substrate, no portion of the substrate being
treated with a hydrophilic polymer; and a backer coupled to
the substrate at a first weld and a second weld, no portion of
the backer being treated with the hydrophilic polymer, the
delivery tube being configured such that the substrate and
the backer are each disposed along a functional length of the
delivery tube.

An embodiment of the invention provides a delivery tube
that includes a substrate, at least a portion of the substrate
being treated with a hydrophilic polymer; and a backer
coupled to the substrate, no portion of the backer being
treated with the hydrophilic polymer, the delivery tube being
configured such that the substrate and the backer are each
disposed along a functional length of the delivery tube, the
substrate and the backer each including Dupont Tyvek.

An embodiment of the invention provides a delivery tube
that includes a substrate, a first portion of the substrate being
treated with a hydrophilic polymer, a second portion and a
third portion of the substrate not being treated with the
hydrophilic polymer; and a backer welded to the second
portion and the third portion of the substrate, the delivery
tube being configured such that the substrate and the backer
are each disposed along a functional length of the delivery
tube.

BRIEF DESCRIPTION OF THE DRAWINGS

The invention will be more fully understood from the
detailed description below and the accompanying drawings,
wherein:

FIG. 1 is a schematic diagram of an irrigation and
fertilization system, according to an embodiment of the
invention;

FIG. 2 is a schematic diagram of an irrigation and
fertilization system, according to an embodiment of the
invention;

FIG. 3 is an assembly view of a delivery tube, illustrated
in cross-section, according to an embodiment of the inven-
tion;

FIG. 4 is a plan view of a delivery tube, according to an
embodiment of the invention;

FIG. 5 is an end view of a partially-opened delivery tube,
according to an embodiment of the invention;

FIG. 6 is an end view of a partially-opened delivery tube,
according to an embodiment of the invention;

FIG. 7 is an end view of a partially-opened delivery tube,
according to an embodiment of the invention;

FIG. 8 is an end view of a delivery tube, according to an
embodiment of the invention;

FIG. 9 is a flow diagram of a method for manufacturing
a delivery tube, according to an embodiment of the inven-
tion;

FIG. 10 is a schematic diagram of a coating apparatus,
according to an embodiment of the invention;

FIG. 11 is a schematic diagram of a coating apparatus,
according to an embodiment of the invention;

FIG. 12 is a schematic diagram of a coating apparatus,
according to an embodiment of the invention;

FIG. 13 is a plan view of a delivery web subsequent to a
welding step, according to an embodiment of the invention;
and

FIG. 14 is a plan view of a three delivery tubes, according
to an embodiment of the invention.

DETAILED DESCRIPTION

Embodiments of the invention will be described more
fully with reference to FIGS. 1 to 14, in which embodiments

of the invention are shown. This invention may, however, be embodied in many different forms and should not be construed as limited to the embodiments set forth herein. The sub-headings below are for organizational convenience only, and features of the invention may be described anywhere in this specification. In the drawings, physical features are not necessarily rendered to scale. Where identical reference numbers are repeated, they refer to the same or substantially similar features.

Exemplary Systems

Embodiments of the invention can be used on farms of varying scale. FIG. 1 is a schematic diagram of an irrigation and fertilization system, according to an embodiment of the invention. The embodiment illustrated in FIG. 1 might be applicable, for instance, to a family farm or other small plot. As shown therein, a small plot supply system 105 is configured to harvest rain water. The small plot supply system 105 feeds a header pipe 110 that is coupled to multiple delivery tubes 115 via fittings 125. Crops 120 are disposed adjacent to each of the delivery tubes 115.

The small plot supply system 105 includes roof gutters 130 positioned to cooperate with a roof 135. Downspouts 140 are coupled to the gutters 130 at an input end and disposed over a storage tank 145 at an output end. The storage tank 145 could be or include, for instance, and elevated plastic 55-gallon drum. The storage tank 145 is configured with a lid 150 having a screen filter 155. The storage tank 145 further includes an overflow outlet 160. An isolation valve 165 is disposed inline between the storage tank 145 and a supply system output 170.

Preferably, each delivery tube 115 includes a responsive portion along its length that is hydrophilic and configured to deliver water or an aqueous solution in response to surfactant root exudate from a root system of the crops 120. In other words, each section of each delivery tube 115 is configured to efficiently deliver water or other solution according to individual crop demand rather than at a regulated rate provided, for example, by sprinkler and drip-based irrigation systems.

As used herein, the term “delivery tube” refers generally to a device for fluid conveyance along a length of the delivery tube and through at least a portion of its walls, and is not intended to restrict the physical form of such device to one having a circular cross-section. For instance, in embodiments of the invention the delivery tubes 115 are “tape-like” with a relatively flat cross-section when unfilled with a fluid. Alternative configurations for the delivery tubes 115 are described in more detail below with reference to FIGS. 3-8.

During periods of rain, the gutters 130 and downspouts 140 direct rain water to the storage tank 145. The screen filter 155 filters solid particles from the rain water as it enters the storage tank 145. If water in the storage tank 145 exceeds a predetermined maximum water level 157, excess water is discharged from the storage tank 145 via the overflow outlet 160.

The size of storage tank 145 and the change in elevation between the maximum water level 157 and the supply system output 170 determine a maximum pressure provided by the small plot supply system 105. In embodiments of the invention, the desired pressure at the supply system output 170 is relatively low, for instance within the range of 0.5-2.1 lb/in² (PSI), for compatibility with the delivery tubes 115.

The desired pressure at the supply system output 170 will vary accordingly to the particular configuration of the delivery tubes 115, however.

The isolation valve 165 could be closed, for instance, during periods of rain (when the crops 120 are unlikely to need hydration) or during maintenance of the downstream irrigation system. When the isolation valve 165 is open, the header pipe 110 supplies rain water to pressurize the delivery tubes 115. Once pressurized, the delivery tubes 115 supply the filtered rain water to the crops 120 in response to the root exudates.

Variations to the system illustrated in FIG. 1 and described above are possible. For example, in alternative embodiments, the small plot supply system 105 may further include a well water feed and/or municipal water feed to supplement the rain-harvesting features in filling the storage tank 145. Such additional feed(s) could be activated, for example, by a float valve in the storage tank 145. There could be more than one storage tank 145 coupled to the supply system output 170. In addition, one of more filters could be placed in-line between the storage tank(s) 145 and the supply system output 170 in addition to, or instead of, the screen filter 155. In alternative embodiments, the small plot supply system 105 includes a fertilizer injection subsystem. End caps and flush valves are not shown in FIG. 1 but are preferably coupled to the header 110. Likewise, each of the delivery tubes 115 may be crimped or capped at a terminal end; alternatively, multiple delivery tubes may be joined by a footer and such footer may include end caps and/or a flush valve.

FIG. 2 is a schematic diagram of an irrigation and fertilization system, according to an embodiment of the invention. The embodiment illustrated in FIG. 2 might be applicable, for instance, to a large commercial farming operation. As shown therein, a commercial grower supply system 205 feeds a header pipe 110 that is coupled to multiple delivery tubes 115 via fittings 125. Crops 120 are disposed adjacent to each of the delivery tubes 115.

The commercial grower supply system 205 includes a well pump 210 coupled to a source line 213. A fertilizer reservoir 215 is also coupled to the source line 213 via a pump 220 and metering valve 225. Each of multiple chemical injection tanks 230 are connected to the source line 213 via a corresponding metering valve 235. Filters 240, pressure regulator 245, and pressure meter 250 are disposed in series between the source line 213 and a system supply output 255. The commercial grower supply system 205 feeds a header pipe 110 that is coupled to multiple delivery tubes 115 via fittings 125. Crops 120 are disposed adjacent to each of the delivery tubes 115.

The pressure regulator 245 is configured to output a relatively low-pressure regulated fluid flow, for instance for a setting within the range of 0.5-2.1 PSI, for compatibility with the delivery tubes 115. An exemplary regulator 245 is the Model 102 diaphragm regulator manufactured by Ziggity Systems, Inc. The desired pressure setting for such an adjustable pressure regulator will vary accordingly to the particular configuration of the delivery tubes 115. In alternative embodiments, other pressure settings and/or other regulators 245 could be used.

In operation, the commercial grower supply system 205 supplies filtered water or a filtered aqueous solution including fertilizer and/or chemicals at a predetermined (and relatively low) pressure via a header pipe 110 to delivery tubes 115. The pressurized delivery tubes 115 supply the water or aqueous solution including soluble fertilizers in response to root exudates from the crops 120.

Variations to the system illustrated in FIG. 2 and described above are possible. For example, in alternative embodiments, the commercial grower supply system 205 could include a municipal water feed to supplement the water supply from the well pump 210. The commercial grower supply system 205 may not include the chemical injection tanks 230 and associated metering valves 235. Moreover, the type and quantity of filters 240 could vary, according to design choice. An isolation valve could be included, for instance between the pressure meter 250 and the supply system output 255. End caps and flush valves are not shown in FIG. 1 but are preferably coupled to the header 110. Likewise, each of the delivery tubes 115 may be crimped or capped at a terminal end; alternatively, multiple delivery tubes may be joined by a footer, and such footer may include end caps and/or a flush valve.

Delivery Tubes

Alternative configurations of the delivery tubes 115 are described below with reference to FIGS. 3-8. FIG. 3 is an assembly view of a delivery tube, illustrated in cross-section, according to an embodiment of the invention. As shown therein, an embodiment of the delivery tube 115 is generally an assembly of a responsive side 305 to a backing side 310. The responsive side 305, or at least a portion thereof, is preferably responsive to root exudate from a root system of the crops 120. In alternative embodiments, the responsive side 305 releases water, liquefied nutrients, and/or other fluids based primarily on fluid supply pressure or a combination of supply pressure and other factors. The backing side 310 is a supporting structure. In the embodiment illustrated in FIG. 3, the resulting delivery tube 115 is essentially a "tape-like" or "lay flat" structure when not in use. The tape-like format is advantageous because the delivery tube 115 can be compactly spooled (reeled) for storage and distribution. The responsive side 305 includes a substrate that is treated with a hydrophilic polymer solution to make it responsive to root exudates. The substrate preferably includes a nonwoven fabric of petroleum-based plastic polymers, for instance polyethylene (PE) or polypropylene (PP).

Acceptable nonwoven PE fabrics for the responsive side 305 include, for instance, DuPont Tyvek (1025BL, 1025D, 1053B, 1053D, 1056D, 1058D, 1059B, 1073B, 1073D, 1079, 1079B, 1079D, or 1085D). Suitable nonwoven PP fabrics for the responsive side 305 include, for example, Fibertex Spuntex 55, Hanes Imperial RB2, Mitsui Chemicals, Suzhou Mediceng (LB543 or WH001F), and related products. Other PE and PP fabrics may also be suitable substrates, according to application demands.

The responsive side 305 may be treated or untreated, according to application needs. Suitable hydrophilic polymers for treating the responsive side 305 include various Polyhydroxystyrene (PHS) co-polymers, for example, Polyhydroxystyrene-Novolak (PHS-Novolak), Polyhydroxystyrene-Benzotriazole (PHS-BZT), and Polyhydroxystyrene Hydroxyethyl Methacrylate (PHS-HEMA). Other hydrophilic polymers may also be used.

The backing side 310 may be or include, for example, Metallocene Polyethylene (PE) from Brentwood Plastics, Inc., Low-Density Polyethylene (LDPE), Linear Low Density Polyethylene (LLDPE), Copolymer polypropylene (PP) by Bloomer Plastics Inc. (BPI) (e.g., the "random" and "impact" products), Homopolymer polypropylene (PP) by BPI, Polyester (PET or polyethylene terephthalate), and Urethane Film by Medco Coated Products (a division of Medco Labs). Any of the nonwoven PE or PP fabrics listed

above as being suitable for the responsive side 305 could also be used for the backing side 310. Other materials could also be used for the backing side 310. The general requirements for the material used for the backing side 310 are that it is water-proof, weldable (bondable), reasonably durable for the target application, and low cost. The backing side 310 material may have a thickness, for example, in the range of 2 to 15 mils.

Various combinations of responsive side 305 and backing side 310 materials as possible for the manufacture of delivery tubes. Preferably, a treated responsive side 305 is paired with a backing side 310. For example, Dupont Tyvek or another nonwoven PE fabric that has been treated with a hydrophilic polymer (the treated responsive side 305) could be paired with untreated Dupont Tyvek or another nonwoven PE fabric (the backing side 310). Alternatively, untreated Dupont Tyvek (the responsive side 305) could be paired with another untreated nonwoven PE fabric (the backing side) to form a delivery tube. The pairing of similar fabrics (e.g., two PE fabrics or two PP fabrics) may be preferable because it generally produces stronger bonds than the pairing of dissimilar fabrics.

In embodiments with a treated responsive side 305, the responsive side 305 requires hydrophilic treatment processing before it is assembled to an untreated backing side 310. Such an assembly may be less expensive than a delivery tube formed entirely of treated material, however. The backing side 310 can also improve the durability of the delivery tube 115 compared to a delivery tube that is formed entirely of responsive material that has been treated with hydrophilic polymers.

Various configurations of the delivery tube 115 are described below with reference to FIGS. 4-8.

FIG. 4 is a plan view of a delivery tube, according to an embodiment of the invention. Weld areas 405 bond edges of the responsive side 305 to corresponding edges of the backing side 310. The weld areas 405 provide a fluidic seal to contain water or an aqueous solution in an interior cavity of the delivery tube 115. The delivery tube 115 is intended for relatively low pressure systems. Preferably, the seal formed by weld areas 405 should withstand a burst pressure of at least 4.0 PSI. In the illustrated embodiment, each weld area 405 includes three rows of intermittent welds, the three rows being staggered with respect to each other. Other weld patterns (intermittent or continuous) are possible.

FIG. 5 is an end view of a partially-opened delivery tube, according to an embodiment of the invention. In the illustrated embodiment, the responsive side 305 may be saturated with a hydrophilic polymer solution over the full width shown in cross-section.

FIG. 6 is an end view of a partially-opened delivery tube, according to an embodiment of the invention. In the illustrated embodiment, the hydrophilic polymer is disposed on a coated portion 615 of an outer surface of the substrate 605. Uncoated portions 610 of the substrate 605 extend into the weld areas 405. In one respect, the configuration shown in FIG. 6 may be advantageous because uncoated portions 610 of the substrate 605 may result in stronger weld areas 405. Selective pattern coating on a surface of the substrate 605 also reduces manufacturing cost relative to saturation coating at least because less hydrophilic polymer may be required.

FIG. 7 is an end view of a partially-opened delivery tube, according to an embodiment of the invention. In the illustrated embodiment, the hydrophilic polymer is disposed on a coated portion 715 of an inner surface of the substrate 705. Uncoated portions 710 of the substrate extend into the weld

areas **405**. The configuration shown in FIG. 7 may also be advantageous because uncoated portions **710** of the substrate **705** may result in stronger weld areas **405**. Selective pattern coating on a surface of the substrate **705** also reduces manufacturing cost relative to saturation coating at least because less hydrophilic polymer may be required.

FIG. 8 is an end view of a delivery tube, according to an embodiment of the invention. As shown therein, a delivery tube with a circular cross-section includes a substrate **805** connected to a backing **810** at overlap welds **815**. In the illustrated embodiment, the substrate **805** forms less than 50% of the delivery tube. The substrate **805** includes a coated portion **825** and uncoated portions **820**. The coated portion **825** represents hydrophilic polymer disposed on an outer surface of the substrate **805**. The uncoated portions **820** extend into the overlap weld areas **815**. The ratio between the substrate **805** and the backing **810** could be varied according to design choice. Decreasing the size of the coated portion **825** and/or the dry polymer weight applied to the coated portion **825** decreases the amount of water or fertilizer solution that is released at a given pressure.

Manufacturing Method

A manufacturing process for the delivery tube **115** is described with reference to FIGS. 9-14.

FIG. 9 is a flow diagram of a method for manufacturing a delivery tube, according to an embodiment of the invention. As shown therein, the process begins in step **905** and then prepares a hydrophilic polymer solution in step **910**. Step **910** may include, for instance mixing a dry hydrophilic polymer powder with a solvent such as Isopropanol 99% (IPA). The concentration of hydrophilic polymer in the solution may be based, for instance, on the target substrate material, the desired concentration of dry hydrophilic polymer on the substrate, and the coating method used. Suitable concentrations of hydrophilic polymer in the solution may be in the range of 2.0-89.0 weight/volume percent, and are preferably in excess of 20 wt/vol % to facilitate high-speed coating methods which reduce evaporation and minimize production costs.

In step **915**, the process coats a substrate (or portion thereof) with the hydrophilic polymer solution to produce a responsive web. As used herein, a "coating" step could be a surface treatment, saturation, or other application of the hydrophilic polymer solution to the nonwoven substrate material. The process dries the responsive web in step **920**. The desired concentration of dry hydrophilic polymer on the substrate will vary according to the substrate material and other factors. As an example, polymer weights in the range of 1.5-5.2 g/m² have produced acceptable results with Tyvek PE substrates.

Next, the process welds the responsive web to a backing film to form a delivery web in step **925**. Welding step **925** could be or include, for example, rotary heat sealing, contact welding, ultrasonic welding, or other plastic welding method. The delivery web is then rolled (spooled) in step **930**.

Preferably, steps **915-930** produce a multi-paneled delivery web. In this instance, the process slits the delivery web to form multiple delivery tubes in step **935** and then rewinds each of the multiple delivery tubes in step **940** before terminating in step **945**. FIGS. 13 and 14 illustrate and exemplary multi-paneled delivery web. Slitting step **935** may utilize, for example, one or more razors, one or more pairs of opposing circular knives, or a slit weld. Rewind step

940 may include rewinding each of the manufactured delivery tubes onto a reel at a desired speed and capacity.

Variations to the manufacturing method described above with reference to FIG. 9 are possible. For instance, in embodiments where the responsive side **305** of the delivery tube is untreated, steps **910**, **915**, and **920** are not required. Rolling step **930** may not be required for a continuous manufacturing flow. Slitting step **935** and rewind step **940** may be, and preferably are, combined into a single process step. In addition, where steps **915-925** produce a single-tube-width web rather than a multi-paneled web, steps **935** and **940** are not required at all. Exemplary coating methods for step **915** are presented below with reference to FIGS. 10-12, although other coating methods could be used in the alternative.

FIG. 10 is a schematic diagram of a coating apparatus, according to an embodiment of the invention. As illustrated, the coating apparatus is configured so that a substrate web **1005** can move in a direction **1010** in cooperation with pulleys **1025** and a Mayer rod (a/k/a a rod doctor) **1030**. A coating pan **1015** contains a hydrophilic polymer solution **1020**. In operation, the substrate web **1005** is dip coated with the hydrophilic solution **1020**. The Mayer rod **1030** operates to remove excess hydrophilic solution **1020** after the substrate web **1005** has exited the coating pan **1015**.

Variations to the dip-coating apparatus illustrated in FIG. 10 are possible. For instance the number and placement of the rollers **1025** can vary according to design choice. In addition, the use of a Mayer rod **1030** is optional.

FIG. 11 is a schematic diagram of a coating apparatus, according to an embodiment of the invention. As shown therein, the coating apparatus is configured so that a substrate web **1105** can advance in a direction **1110** in cooperation with pulleys **1125**, steel roller **1130** and rubber roller **1135**. A coating pan **1115** contains a hydrophilic polymer solution **1120** and is at least partially covered by a lid **1140**. In operation, the substrate web **1110** passes through openings **1145** and **1150** in the lid **1140** and is dip coated with the hydrophilic solution **1120**. The lid **1140** advantageously limits evaporation of solvent in the hydrophilic solution **1120**. The rubber roller cooperates with the steel roller **1130** to remove excess hydrophilic solution **1120** after the substrate web **1105** has exited the coating pan **1115**.

Variations to the configuration of the dip-coating apparatus illustrated in FIG. 11 are possible. For instance the number and placement of the rollers **1125** can vary according to design choice. In addition, the use of a rubber roller **1135** is optional.

FIG. 12 is a schematic diagram of a coating apparatus, according to an embodiment of the invention. The coating apparatus is configured so that a substrate web **1205** can progress in a direction **1210** between opposing rollers **1225** and **1230**. The roller **1225** is a gravure roller having an engraved (or etched) surface. The gravure roller **1225** is partially submerged in hydrophilic polymer solution **1220** that is contained by the coating pan **1215**. Roller **1230** is a pressure roller configured to place a downward force on the substrate web **1205**. A scraper (doctor) blade is disposed adjacent to the gravure roller **1225**. In operation, the gravure roller **1225** picks up hydrophilic polymer solution **1220** in its engraved (or etched) surface. The scraper blade **12235** removes excess hydrophilic polymer solution **1220** from a surface of the gravure roller **1225**. Remaining hydrophilic polymer solution **1220** is deposited from the engraved (or etched) cavities of the gravure roller **1225** to at least a portion of a surface of the substrate web **1205**.

FIG. 13 is a plan view of a delivery web subsequent to a welding step, according to an embodiment of the invention. FIG. 13 illustrates a delivery web 1305, for instance, after the welding step 925 described above with reference to FIG. 9. In the embodiment shown in FIG. 13 the delivery web 1305 includes six linear weld areas 1310, each of the weld areas 1310 including three staggered rows of intermittent welds. The weld patterns in each of the weld areas 1310 could vary from what is shown.

FIG. 14 is a plan view of a three delivery tubes, according to an embodiment of the invention. FIG. 14 illustrates the delivery web 1305, for instance, after the slitting step 935 described above with reference to FIG. 9. As shown, slit lines 1405 and 1410 separate the delivery web 1305 into three delivery tubes 1415, 1420, and 1425.

Although FIGS. 13 and 14 illustrate a 3-panel approach, a manufacturing process that is configured for a greater or lesser numbers of panels is also possible.

EXAMPLES

Preferably, delivery tubes are fabricated with a PE substrate and PE backing, or with a PP substrate and a PP backing. Example delivery tubes have been fabricated consistent with the configuration illustrated in FIGS. 3-5. A first group of samples used Tyvek 1059B PE substrates with a basis weight of 64.4 gsm and a thickness range of 2.9 to 10.1 mils. A second group of samples used Tyvek 1073 PE substrates with a basis weight of 74.6 gsm and a thickness range of 3.5 to 11.1 mils. Samples from both groups were coated using a gravure coating process to apply a dry hydrophilic polymer coating at a weight of 5.0 to 5.3 gsm. The coated PE substrates were bonded to a 5.0 mil thick Metallocene PE backer via ultrasonic weld or rotary heat seal. The resulting delivery tubes had an internal diameter of $\frac{3}{8}$ to $\frac{7}{8}$ inches. In agricultural testing, the tubes were observed to be structurally robust and locally responsive to plant hydration and nutrition needs.

SUMMARY

This specification has thus described an improved irrigation and fertilization delivery tube, a method for manufacturing the delivery tube, and exemplary systems utilizing the delivery tube. As described above, embodiments of the invention utilize low-cost materials and high-throughput manufacturing processes to produce a responsive delivery tube. The result is a delivery tube that can be sold at an affordable end-user price. The disclosed delivery tube is also highly durable in use. Embodiments of the invention enable a highly-efficient plant-responsive irrigation and fertilization delivery system that is comparable in total life cycle cost to less-efficient non-responsive drip irrigation systems. Other embodiments provide delivery tubes that are responsive to regulated supply pressure and/or other factors. The improved systems, delivery tubes, and manufacturing processes disclosed in this application can ultimately benefit both small-plot and commercial farms.

It will be apparent to those skilled in the art that modifications and variations can be made to the tube, its manufacturing method, and/or its use in a system without deviating from the spirit or scope of the invention disclosed herein.

We claim:

1. A delivery tube, comprising:
 - a substrate, a portion of the substrate being treated with a hydrophilic polymer, the substrate including nonwoven polyethylene; and
 - a backer welded to the substrate at a first weld area and a second weld area, the first and second weld areas extending over the functional length of the delivery tube, the backer including nonwoven polyethylene, the delivery tube being configured such that the substrate and the backer are each disposed along a functional length of the delivery tube, a lumen of the delivery tube being formed between at least a portion of the substrate and at least a portion of the backer, the portion of the substrate being treated with the hydrophilic polymer excluding the first and second weld areas.
2. The delivery tube of claim 1, wherein each of the first and second weld areas include first and second rows of intermittent welds, the first row of intermittent welds being staggered with respect to the second row of intermittent welds.
3. The delivery tube of claim 2, wherein each of the first and second weld areas further include a third row of intermittent welds, the third row of intermittent welds being staggered with respect to at least one of the first and second rows of intermittent welds.
4. The delivery tube of claim 1, each of the first and second weld areas including a rotary heat seal.
5. The delivery tube of claim 1, each of the first and second weld areas including a continuous weld.
6. A delivery tube, comprising:
 - a substrate; and
 - a backer welded to the substrate at a first weld area and a second weld area, the first and second weld areas extending over the functional length of the delivery tube, the delivery tube being configured such that the substrate and the backer are each disposed along a functional length of the delivery tube, a lumen of the delivery tube being formed between at least a portion of the substrate and at least a portion of the backer, each of the first and second weld areas including a first and second row of intermittent welds, the first row of intermittent welds being staggered with respect to the second row of intermittent welds.
7. The delivery tube of claim 6, wherein each of the first and second weld areas further includes a third row of intermittent welds, the third row of intermittent welds being staggered with respect to at least one of the first and second rows of intermittent welds.
8. The delivery tube of claim 6, each of the first and second weld areas including a rotary heat seal.
9. A delivery web, comprising:
 - a substrate; and
 - a backer welded to the substrate at a plurality of weld areas, each of the plurality of weld areas extending over the functional length of the delivery web, the delivery web being configured such that the substrate and the backer are each disposed along a functional length of the delivery web,
 - a first lumen of the delivery web being formed between a first portion of the substrate, a first portion of the backer, and a first and second of the plurality of weld areas,
 - a second lumen of the delivery web being formed between a second portion of the substrate, a second portion of the backer, and a third and fourth of the plurality of weld areas, the web being configured such that fluid communication is not possible between the first lumen and the second lumen.

10. The delivery web of claim 9, further comprising a third lumen of the delivery web being formed between a third portion of the substrate, a third portion of the backer, and a fifth and sixth of the plurality of weld areas, the web being configured such that fluid communication is not possible between any two or more of the first, second, and third lumens. 5

11. The delivery web of claim 9, wherein a portion of the substrate is treated with a hydrophilic polymer.

12. The delivery web of claim 11, wherein the portion of the substrate treated with the hydrophilic polymer excludes the plurality of weld areas. 10

13. The delivery web of claim 9, wherein each of the plurality of weld areas includes first, second, and third rows of intermittent welds, the first row of intermittent welds being staggered with respect to the second row of intermittent welds, the third row of intermittent welds being staggered with respect to at least one of the first and second rows of intermittent welds. 15

14. The delivery web of claim 9, each of the plurality of welds areas including a rotary heat seal. 20

15. The delivery web of claim 9, each of the plurality of welds areas including a continuous weld.

* * * * *